
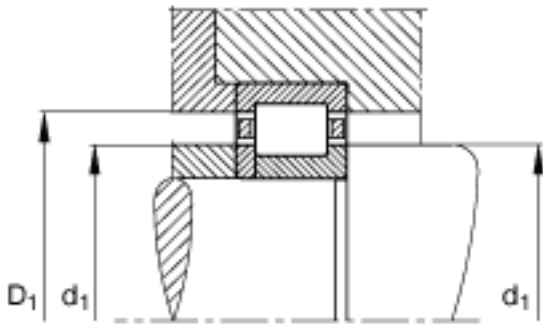


FAG NUP322-E-TVP2参数

尺寸	$d_{a \min}$	124	mm	-
	$d_{c \min}$	158	mm	-
	F	143	mm	-
	$r_{1 \min}$	3	mm	-
	$r_{a \max}$	2.5	mm	-
	$r_{al \max}$	2.5	mm	-
	r_{\min}	3	mm	-
	s	0	mm	距离中心位置的轴向偏移
重量	m	10700	g	质量
基本额定载荷	C_r	495000	N	基本额定动载荷，径向
	C_{0r}	475000	N	基本额定静载荷，径向
极限转速	n_G	3350	r/min	极限转速
参考转速	n_B	3100	r/min	参考速度
疲劳极限载荷	C_{ur}	79000	N	疲劳极限载荷，径向
尺寸	d	110	mm	-
	D	240	mm	-
	B	50	mm	-
	B_3	8	mm	-
	D_1	200.9	mm	-
	$D_{a \max}$	226	mm	-
	d_1	155.6	mm	-
	$d_{a \max}$	140	mm	-

FAG NUP322-E-TVP2图片

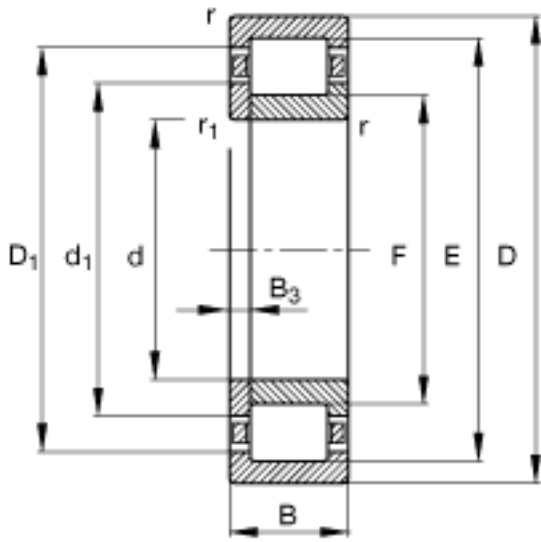

参考资料:<http://www.sozhou.com/p/04ec576b.html>

