


SKF BSA 209 C参数

主要尺寸	d	45	mm	-
	D	85	mm	-
	H	18	mm	-
基本额定载荷	C	45000	N	动载荷
	C_0	134000	N	静载荷
疲劳载荷极限	P_u	4900	N	-
可达转速	Grease lubrication	6300	r/min	-
	Oil-air lubrication	7500	r/min	-
重量	重量	510	g	-
型号	型号	BSA 209 C	-	-

SKF BSA 209 C图片

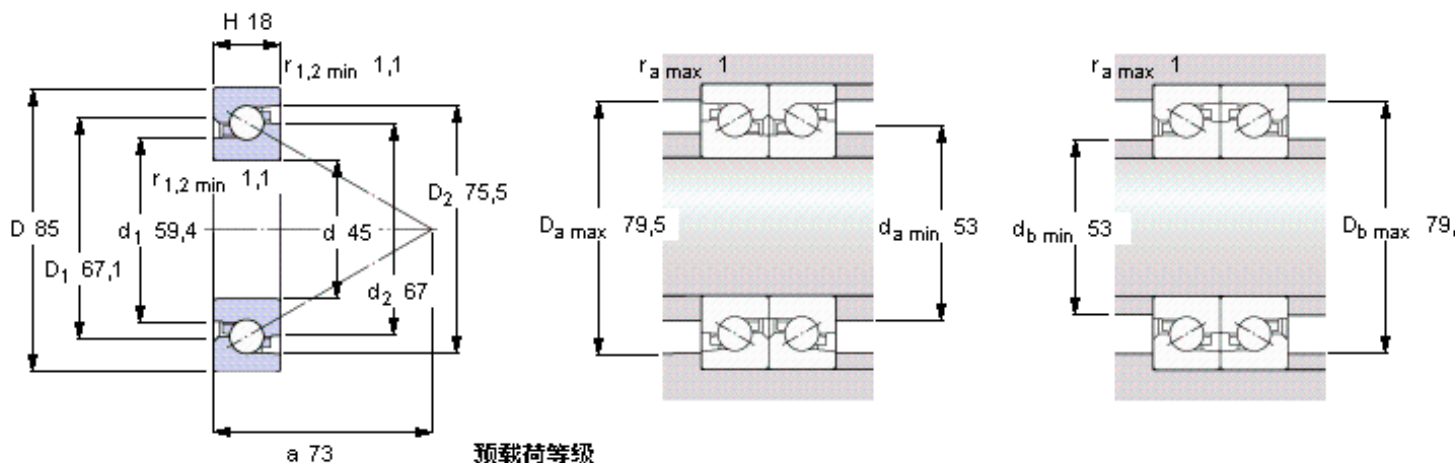

预载荷等级




预载荷等级	A	B
Preload ¹⁾ [N]	3750	7500
Frictional moment ¹⁾ [Nm] (guideline value)	0,5	0,52
Static axial stiffness ¹⁾ [N/μm] (guideline value)	1290	1640

Max. axial load carrying capacity
(guideline value)
40,2

Reference grease quantity [cm³]
 $G_{ref} 4,5$

¹⁾ Values apply to unmounted bearing set with two bearings arranged back-to-back or face-to-face

参考资料: <http://www.sozhou.com/p/091fe8c1.html>

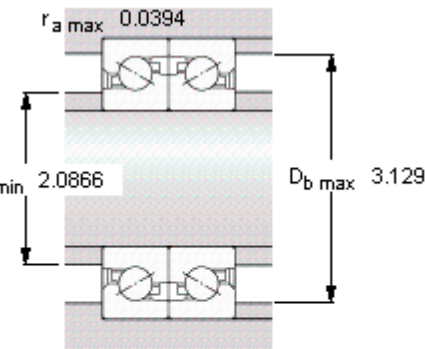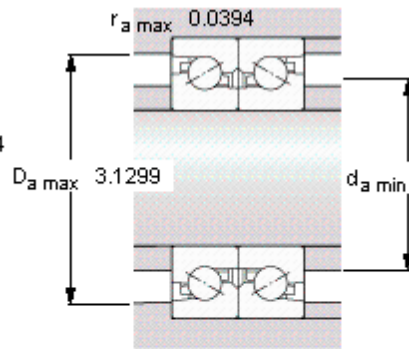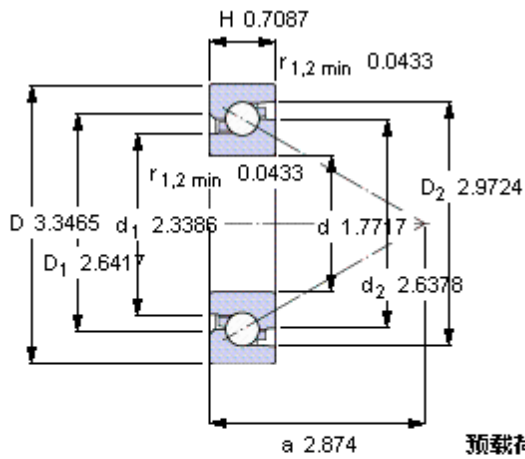

预载荷等级

	A	B
Preload¹⁾ [N]	3750	7500
Frictional moment¹⁾ [Nm] (guideline value)	0,5	0,52
Static axial stiffness¹⁾ [N/μm] (guideline value)	1290	1640

Max. axial load carrying capacity

(guideline value)
40,2

Reference grease quantity [cm³]

G_{ref} 4,5

Preload¹⁾ [N]

Frictional moment¹⁾ [Nm]

(guideline value)

Static axial stiffness¹⁾ [N/μm]

(guideline value)

¹⁾ Values apply to unmounted bearing set with two bearings arranged back-to-back or face-to-face