


FAG 7212-B-JP参数

尺寸	r_{\min}	1.5	mm	-
重量	m	782	g	质量
基本额定载荷	C_r	59000	N	基本额定动载荷，径向
计算系数	e	1.14		-
	X	0.35		-
	Y	0.57		-
	Y_0	0.26		-
基本额定载荷	C_{0r}	45000	N	基本额定静载荷，径向
极限转速	n_G	7500	r/min	极限转速
参考转速	n_B	6200	r/min	参考速度
疲劳极限载荷	C_{ur}	3050	N	疲劳极限载荷，径向
尺寸	d	60	mm	-
	D	110	mm	-
	$r_{al\ max}$	1	mm	-
	$r_{l\ min}$	1	mm	-
	$r_{a\ max}$	1.5	mm	-
	B	22	mm	-
	d_1	80.3	mm	-
	a	47	mm	-
	D_1	90.8	mm	-
	$D_{a\ max}$	101	mm	-
	$D_{b\ max}$	104.4	mm	-
	$d_{a\ min}$	69	mm	-

FAG 7212-B-JP图片

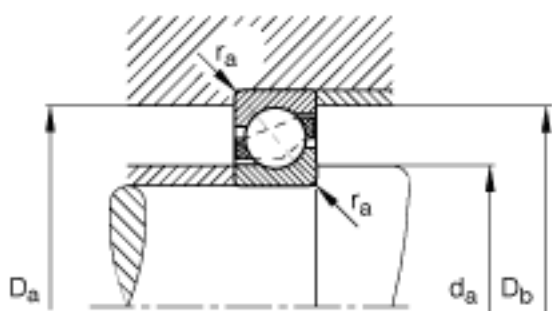

参考资料: <http://www.sozhou.com/p/111bca8d.html>