


### FAG NJ217-E-TVP2参数

尺寸	d	85	mm	-
	D	150	mm	-
	B	28	mm	-
	B <sub>1</sub>	8	mm	-
	B <sub>2</sub>	12.5	mm	-
	D <sub>1</sub>	131.5	mm	-
	D <sub>a max</sub>	139	mm	-
	d <sub>1</sub>	107.5	mm	-
	d <sub>a max</sub>	99	mm	-
	d <sub>a min</sub>	96	mm	-
	d <sub>c min</sub>	110	mm	-
	F	100.5	mm	-
	r <sub>1 min</sub>	2	mm	-
	r <sub>a max</sub>	2	mm	-
	r <sub>a1 max</sub>	2	mm	-
	r <sub>min</sub>	2	mm	-
	s	0.8	mm	距离中心位置的轴向偏移
重量	m	1950	g	质量
基本额定载荷	C <sub>r</sub>	194000	N	基本额定动载荷，径向
	C <sub>0r</sub>	194000	N	基本额定静载荷，径向
极限转速	n <sub>G</sub>	5600	r/min	极限转速
参考转速	n <sub>B</sub>	4050	r/min	参考速度
疲劳极限载荷	C <sub>ur</sub>	33500	N	疲劳极限载荷，径向

### FAG NJ217-E-TVP2图片



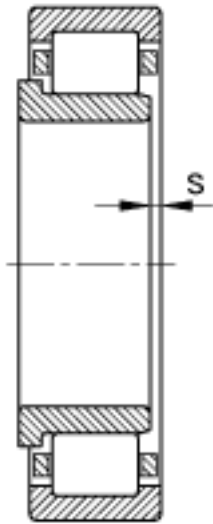

参考资料:<http://www.sozhou.com/p/15d8480e.html>