


FAG NJ2322-E-TVP2 + HJ2322-E参数

尺寸	d	110	mm	-	
	D	240	mm	-	
	B	80	mm	-	
	B <sub>1</sub>	14	mm	-	
	B <sub>2</sub>	26.5	mm	-	
	D <sub>1</sub>	200.9	mm	-	
	D <sub>a max</sub>	226	mm	-	
	d <sub>1</sub>	155.6	mm	-	
	d <sub>a max</sub>	140	mm	-	
	d <sub>a min</sub>	124	mm	-	
	d <sub>c min</sub>	158	mm	-	
	E	211	mm	-	
	F	143	mm	-	
	r <sub>1 min</sub>	3	mm	-	
	r <sub>a max</sub>	2.5	mm	-	
	r <sub>al max</sub>	2.5	mm	-	
	r <sub>min</sub>	3	mm	-	
	s	5.8	mm	距离中心位置的轴向偏移	
	说明		HJ2322-E		型号, L 型圈
	重量	m	16900	g	质量
m <sub>1</sub>		1300	g	质量, L 型圈	
基本额定载荷	C <sub>r</sub>	750000	N	基本额定动载荷, 径向	
	C <sub>0r</sub>	800000	N	基本额定静载荷, 径向	
极限转速	n <sub>G</sub>	3350	r/min	极限转速	
参考转速	n <sub>B</sub>	2320	r/min	参考速度	
疲劳极限载荷	C <sub>ur</sub>	136000	N	疲劳极限载荷, 径向	

FAG NJ2322-E-TVP2 + HJ2322-E图片

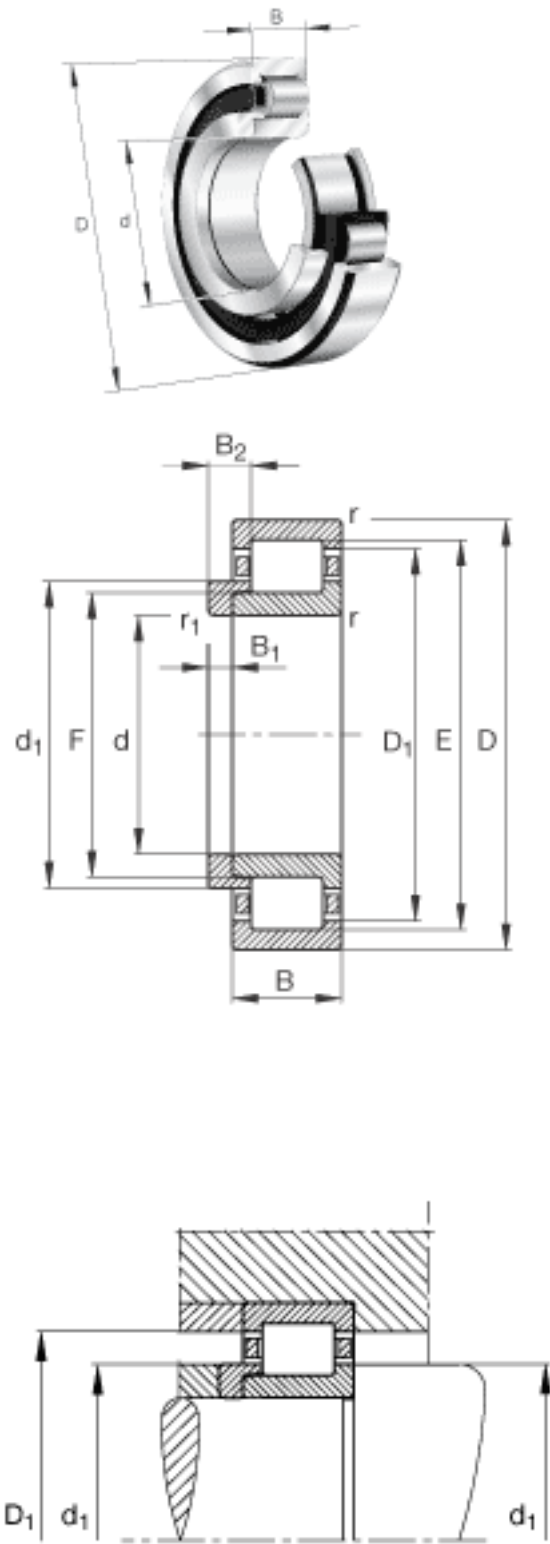

参考资料:<http://www.sozhou.com/p/1e8dedee.html>

