


### FAG NJ316-E-TVP2参数

尺寸	d	80	mm	-
	D	170	mm	-
	B	39	mm	-
	B <sub>1</sub>	11	mm	-
	B <sub>2</sub>	17	mm	-
	D <sub>1</sub>	143.9	mm	-
	D <sub>a max</sub>	158	mm	-
	d <sub>1</sub>	110.4	mm	-
	d <sub>a max</sub>	99	mm	-
	d <sub>a min</sub>	92	mm	-
	d <sub>c min</sub>	114	mm	-
	F	101	mm	-
	r <sub>1 min</sub>	2.1	mm	-
	r <sub>a max</sub>	2.1	mm	-
	r <sub>a1 max</sub>	2.1	mm	-
	r <sub>min</sub>	2.1	mm	-
	s	0.7	mm	距离中心位置的轴向偏移
重量	m	4030	g	质量
基本额定载荷	C <sub>r</sub>	300000	N	基本额定动载荷，径向
	C <sub>0r</sub>	275000	N	基本额定静载荷，径向
极限转速	n <sub>G</sub>	4800	r/min	极限转速
参考转速	n <sub>B</sub>	4150	r/min	参考速度
疲劳极限载荷	C <sub>ur</sub>	49500	N	疲劳极限载荷，径向

### FAG NJ316-E-TVP2图片



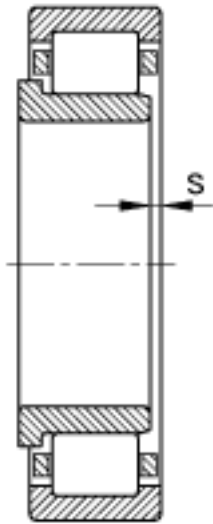

参考资料:<http://www.sozhou.com/p/23aa7e1c.html>