


SKF BSA 202 C参数

主要尺寸	d	15	mm	-
	D	35	mm	-
	H	11	mm	-
基本额定载荷	C	12700	N	动载荷
	C_0	25500	N	静载荷
疲劳载荷极限	P_u	950	N	-
可达转速	Grease lubrication	12000	r/min	-
	Oil-air lubrication	15000	r/min	-
重量	重量	54	g	-
型号	型号	BSA 202 C	-	-

SKF BSA 202 C图片

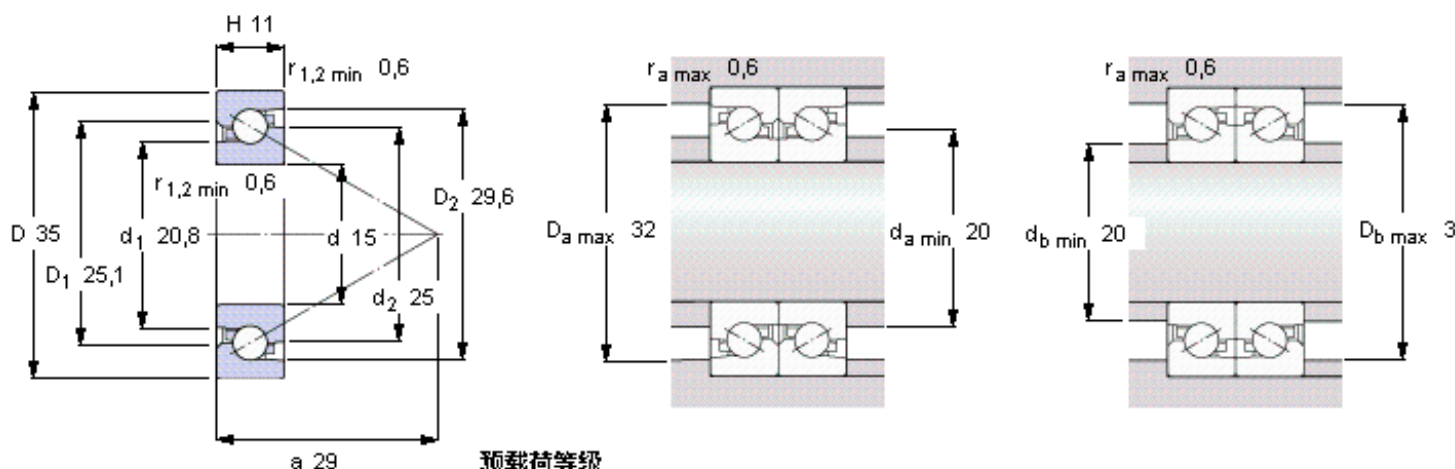

Preload¹⁾ [N]

Frictional moment¹⁾ [Nm]
(guideline value)

Static axial stiffness¹⁾ [N/μm]
(guideline value)

¹⁾ Values apply to unmounted bearing set with two bearings arranged back-to-back or face-to-face

预载荷等级

	A	B
Preload ¹⁾ [N]	770	1540
Frictional moment ¹⁾ [Nm] (guideline value)	0,022	0,038
Static axial stiffness ¹⁾ [N/μm] (guideline value)	460	580




Max. axial load carrying capacity
(guideline value)

8,5

Reference grease quantity [cm³]

G_{ref} 0,5

参考资料: <http://www.sozhou.com/p/33504477.html>

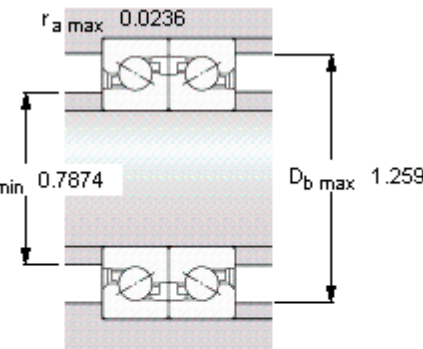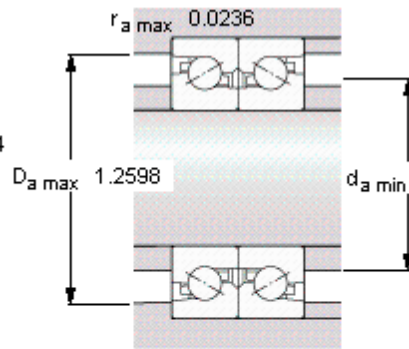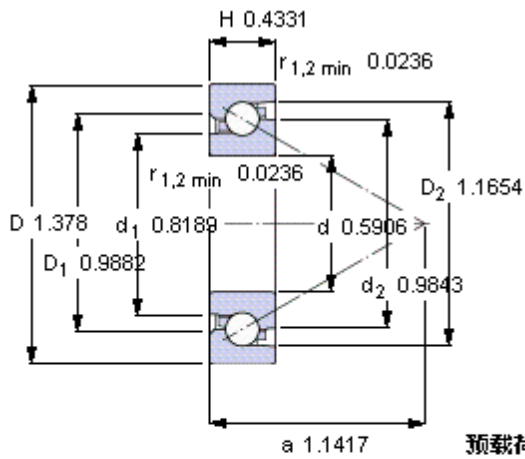

预载荷等级

Preload¹⁾ [N]

	A	B
Preload ¹⁾ [N]	770	1540

Frictional moment¹⁾ [Nm]

(guideline value)

Frictional moment ¹⁾ [Nm]	0,022	0,038
--------------------------------------	-------	-------

Static axial stiffness¹⁾ [N/μm]

(guideline value)

Static axial stiffness ¹⁾ [N/μm]	460	580
---	-----	-----

Max. axial load carrying capacity

(guideline value)

8,5

Reference grease quantity [cm³]

G_{ref} 0,5

¹⁾ Values apply to unmounted bearing set with two bearings arranged back-to-back or face-to-face