


SKF 706 CE/HCP4A参数

主要尺寸	d	6	mm	-
	D	17	mm	-
	B	6	mm	-
基本额定载荷	C	1560	N	动载荷
	C_0	500	N	静载荷
疲劳载荷极限	P_u	22	N	-
可达转速	Grease	170000	r/min	-
	Oil-air	260000	r/min	-
重量	重量	5	g	-
型号	型号	706 CE/HCP4A	-	-

SKF 706 CE/HCP4A图片

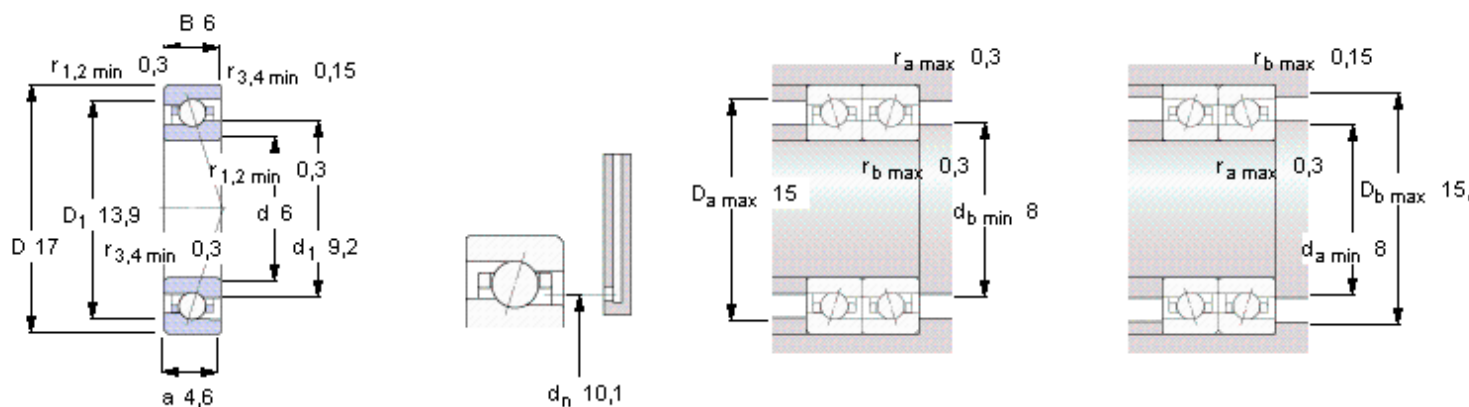

Ball diameter 3,175
Number of balls 8

未安装时的预载荷 [N]
背对背配置，面对面配置
预载荷等级

A	B	C	D
10	25	50	-

Static axial stiffness [N/ μm]
(guideline value)

预载荷等级





A	B	C	D
9	13	18	-

Reference grease quantity [cm³]
 G_{ref} 0,09

计算系数
for equivalent bearing load
 f_0 6,4

for preload in mounted bearing sets
 f 1,02
 f_1 1
 f_{2A} 1
 f_{2B} 1,03
 f_{2C} 1,05
 f_{2D} -
 f_{HC} 1,01

参考资料: <http://www.sozhou.com/p/33937082.html>

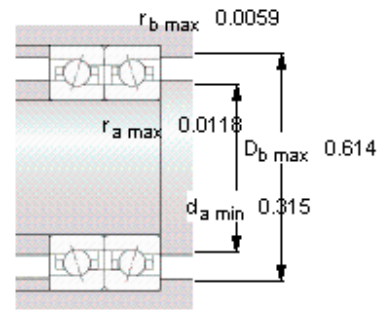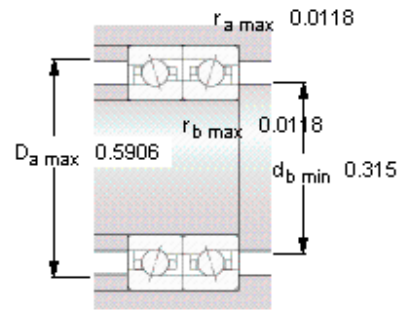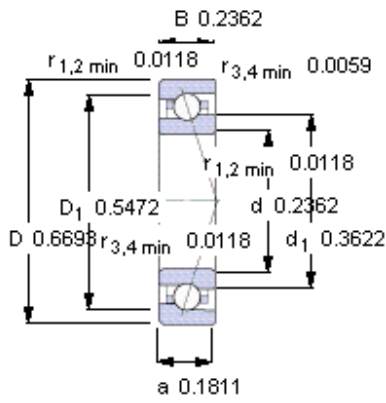

Ball diameter 3,175

Number of balls 8

未安装时的预载荷 [N]

背对背配置，面对面配置

预载荷等级

A	B	C	D
10	25	50	-

Static axial stiffness [N/μm]

(guideline value)

预载荷等级

A	B	C	D
9	13	18	-

Reference grease quantity [cm³]

G_{ref} 0,09

计算系数

for equivalent bearing load

f₀ 6,4

for preload in mounted bearing sets

f 1,02

f₁ 1

f_{2A} 1

f_{2B} 1,03

f_{2C} 1,05

f_{2D} -

f_{HC} 1,01