
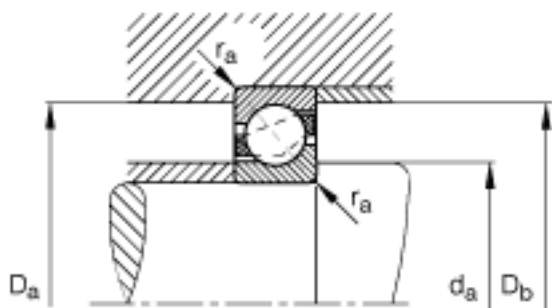


FAG 7308-B-TVP参数

| | | | | |
|--------|---------------|-------|-------|------------|
| 尺寸 | d | 40 | mm | - |
| | D | 90 | mm | - |
| | B | 23 | mm | - |
| | a | 39 | mm | - |
| | D_1 | 71.3 | mm | - |
| | $D_{a \max}$ | 81 | mm | - |
| | $D_{b \max}$ | 84.4 | mm | - |
| | d_1 | 59.5 | mm | - |
| | $d_{a \min}$ | 49 | mm | - |
| | $r_{1 \min}$ | 1 | mm | - |
| | $r_{a \max}$ | 1.5 | mm | - |
| | $r_{a1 \max}$ | 1 | mm | - |
| | r_{\min} | 1.5 | mm | - |
| | 重量 | m | 610 | g |
| 基本额定载荷 | C_r | 53000 | N | 基本额定动载荷，径向 |
| 计算系数 | e | 1.14 | | - |
| | X | 0.35 | | - |
| | Y | 0.57 | | - |
| | Y_0 | 0.26 | | - |
| 基本额定载荷 | C_{0r} | 34500 | N | 基本额定静载荷，径向 |
| 极限转速 | n_G | 9500 | r/min | 极限转速 |
| 参考转速 | n_B | 7100 | r/min | 参考速度 |
| 疲劳极限载荷 | C_{ur} | 2320 | N | 疲劳极限载荷，径向 |

FAG 7308-B-TVP图片

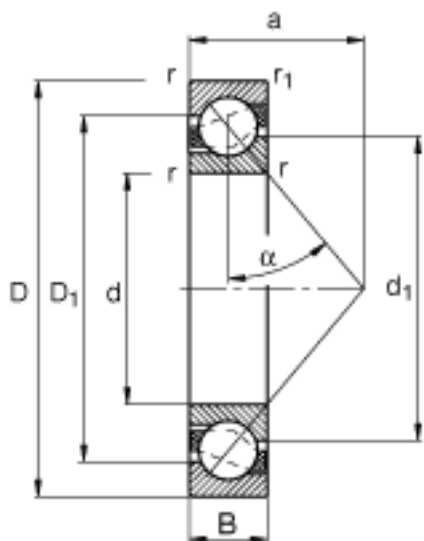

参考资料: <http://www.sozhou.com/p/368b7fe5.html>