
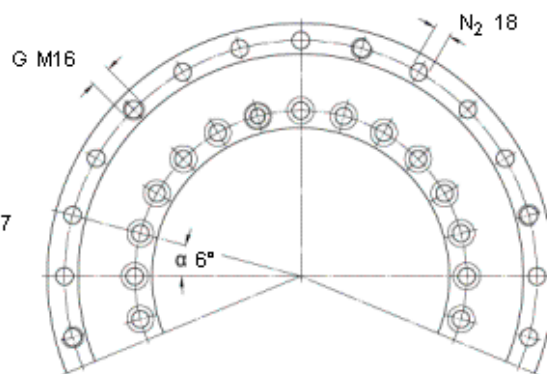


SKF NRT 850 A参数

主要尺寸	d	850	mm	-
	D	1095	mm	-
	H	124	mm	-
基本额定载荷	C	473000	N	动载荷
	C_0	2120000	N	静载荷
	C	415000	N	动载荷
	C_0	6400000	N	静载荷
极限转速	Grease lubrication	40	r/min	-
	Oil lubrication	80	r/min	-
Guideline rotarytable diameter	Guideline rotary table diameter	1800	mm	-
重量	重量	253000	g	-
型号	型号	NRT 850 A	-	-

SKF NRT 850 A图片

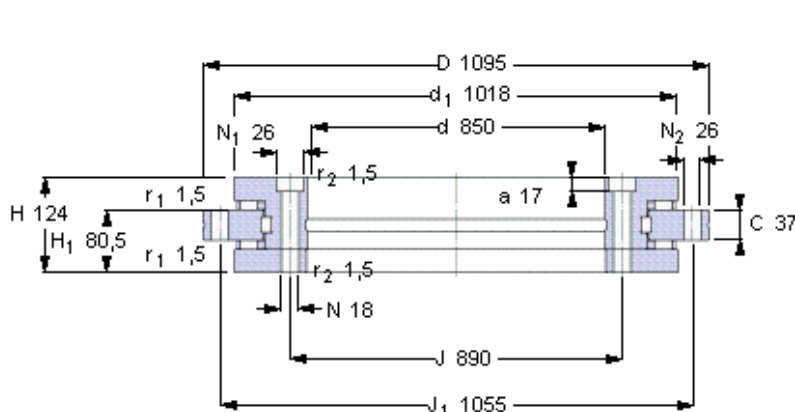

Axial preload [kN] 47
(average value)

Axial unloading force [kN] 103
(average value)

Frictional moment C_{RL} [Nm] 300
(guideline value)

Stiffness

(values refer to the roller set)

Axial [kN/ μ m] 77

Radial [kN/ μ m] 22,4

Movement [kNm/mrad] 7011

Retaining bolts 2 x M16 , 180°

Removal threads G 6 x M16 , 60°

Required attachment bolts



Shaft (no. of bolts x pitch) 58 x 6°

with 2 positions omitted at 180° apart at retaining bolt positions

Housing (no. of bolts x pitch) 54 x 6°

with 6 positions omitted at 60° apart at removal thread positions

Recommended tightening torque for attachment bolts grade 10.9 [Nm]
284 (M16)

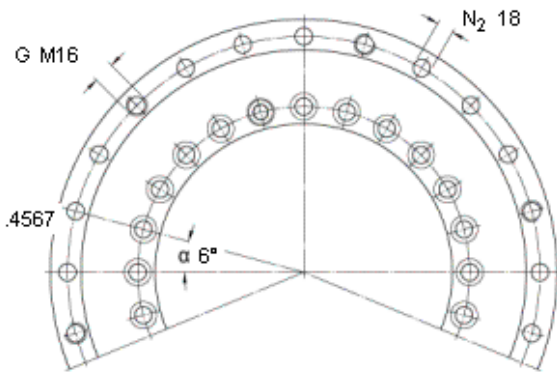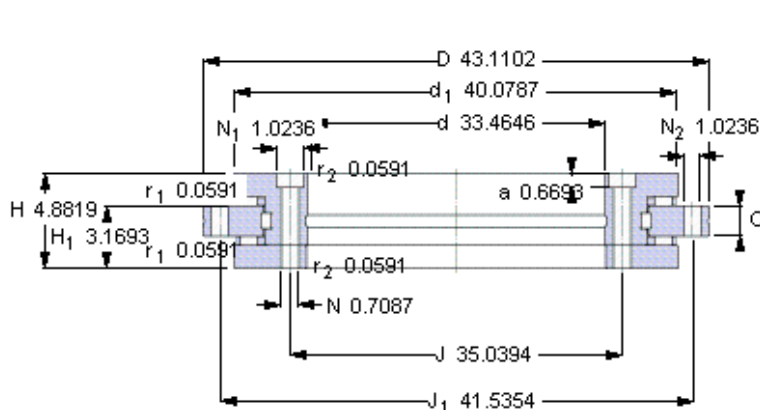

Axial preload [kN] 47
(average value)

Axial unloading force [kN] 103
(average value)

Frictional moment C_{RL} [Nm] 300
(guideline value)

Stiffness

(values refer to the roller set)

Axial [kN/ μ m] 77

Radial [kN/ μ m] 22,4

Movement [kNm/mrad] 7011

Retaining bolts 2 x M16 , 180°

Removal threads G 6 x M16 , 60°

Required attachment bolts

Shaft (no. of bolts x pitch) 58 x 6°

with 2 positions omitted at 180° apart at retaining bolt positions

Housing (no. of bolts x pitch) 54 x 6°

with 6 positions omitted at 60° apart at removal thread positions

Recommended tightening torque for attachment bolts grade 10.9 [Nm]

11.18 (M16)

参考资料: <http://www.sozhou.com/p/4385ef8c.html>