


## NSK 54408U参数

基本额定载荷	COA	19100	kgf	静载荷	
极限转速	GRE	1700	1/min	脂润滑	
	OIL	2400	1/min	油润滑	
尺寸	SD3	90.0	mm	-	
	D1	42	mm	-	
	D2	65	mm	-	
	D3	95	mm	-	
	T2	40.0	mm	-	
	T6	42.2	mm	-	
	T8	46.0	mm	-	
	B	15	mm	-	
	SB	12.0	mm	-	
	A1	22.0	mm	-	
	R	72	mm	-	
	安装尺寸	DA	65	mm	(最大)
		SRA	1.0	mm	(最大)
		SRB	0.6	mm	(最大)
重量	MASS	2540	g	重量	
型号	型号	54408U		-	
外形尺寸	SD2	30	mm	内径	
	SD	40	mm	外径	
	D	90	mm	宽度	
	T1	65	mm	-	
	T5	69.4	mm	-	
	T7	77	mm	-	
	SR	1.1	mm	(最小)	
	SR1	0.6	mm	(最小)	
	基本额定载荷	CAN	103000	N	动载荷
COAN		188000	N	静载荷	
CA		10500	kgf	动载荷	

## NSK 54408U图片

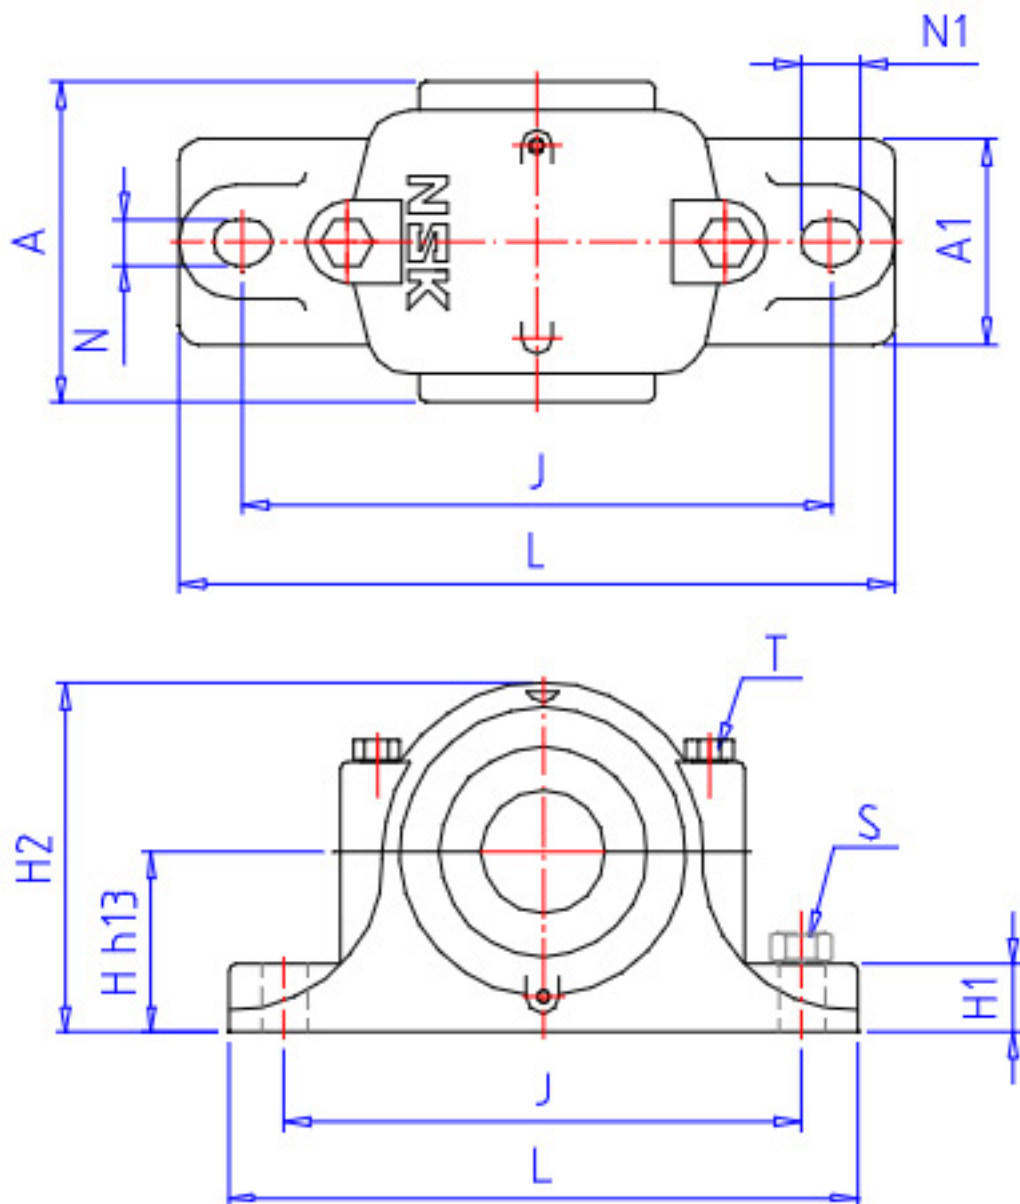

参考资料:<http://www.sozhou.com/p/482b5d7c.html>

