


FAG NJ2313-E-TVP2 + HJ2313-E参数

尺寸	d	65	mm	-	
	D	140	mm	-	
	B	48	mm	-	
	B ₁	10	mm	-	
	B ₂	18	mm	-	
	D ₁	118.6	mm	-	
	D _{a max}	128	mm	-	
	d ₁	90.5	mm	-	
	d _{a max}	81	mm	-	
	d _{a min}	77	mm	-	
	d _{c min}	93	mm	-	
	E	124.5	mm	-	
	F	82.5	mm	-	
	r _{1 min}	2.1	mm	-	
	r _{a max}	2.1	mm	-	
	r _{al max}	2.1	mm	-	
	r _{min}	2.1	mm	-	
	s	4	mm	距离中心位置的轴向偏移	
	说明		HJ2313-E		型号, L 型圈
	重量	m	3380	g	质量
m ₁		303	g	质量, L 型圈	
基本额定载荷	C _r	295000	N	基本额定动载荷, 径向	
	C _{0r}	285000	N	基本额定静载荷, 径向	
极限转速	n _G	5900	r/min	极限转速	
参考转速	n _B	4050	r/min	参考速度	
疲劳极限载荷	C _{ur}	53000	N	疲劳极限载荷, 径向	

FAG NJ2313-E-TVP2 + HJ2313-E图片

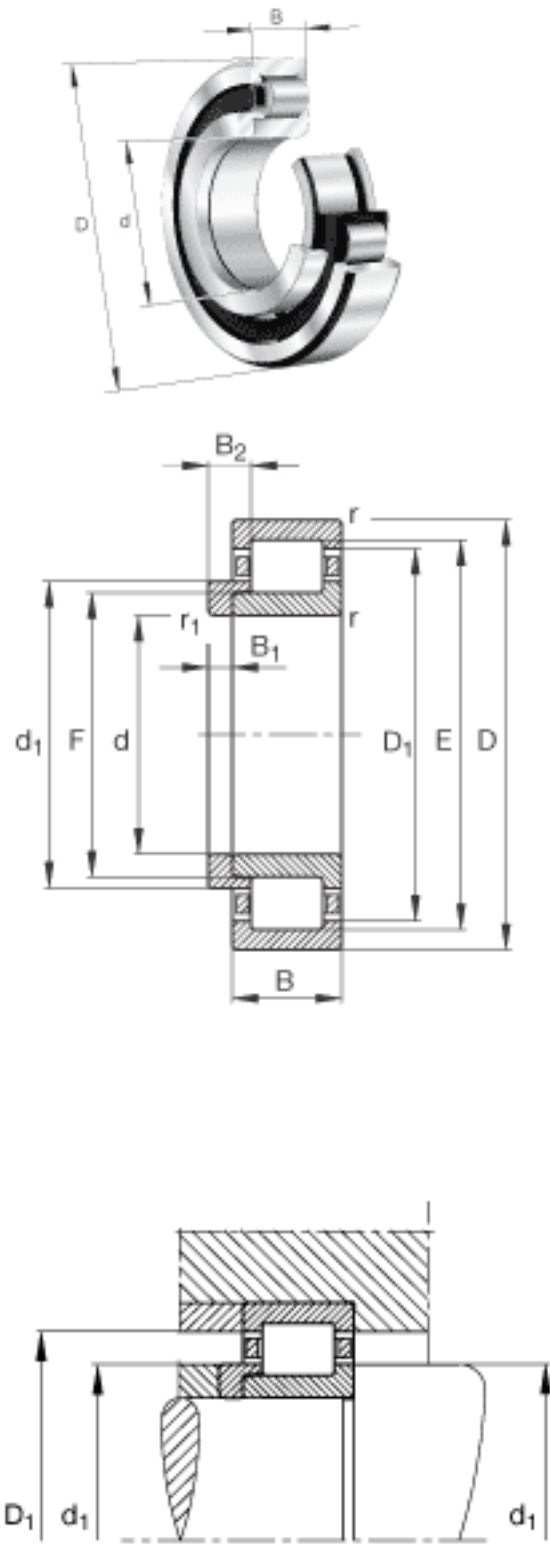

参考资料:<http://www.sozhou.com/p/4879647c.html>

