


### FAG NJ219-E-TVP2参数

尺寸	d	95	mm	-
	D	170	mm	-
	B	32	mm	-
	B <sub>1</sub>	9	mm	-
	B <sub>2</sub>	14	mm	-
	D <sub>1</sub>	148.6	mm	-
	D <sub>a max</sub>	158	mm	-
	d <sub>1</sub>	120.5	mm	-
	d <sub>a max</sub>	111	mm	-
	d <sub>a min</sub>	107	mm	-
	d <sub>c min</sub>	123	mm	-
	F	112.5	mm	-
	r <sub>1 min</sub>	2.1	mm	-
	r <sub>a max</sub>	2.1	mm	-
	r <sub>a1 max</sub>	2.1	mm	-
	r <sub>min</sub>	2.1	mm	-
	s	0.7	mm	距离中心位置的轴向偏移
重量	m	2940	g	质量
基本额定载荷	C <sub>r</sub>	260000	N	基本额定动载荷，径向
	C <sub>0r</sub>	265000	N	基本额定静载荷，径向
极限转速	n <sub>G</sub>	4850	r/min	极限转速
参考转速	n <sub>B</sub>	3700	r/min	参考速度
疲劳极限载荷	C <sub>ur</sub>	44000	N	疲劳极限载荷，径向

### FAG NJ219-E-TVP2图片



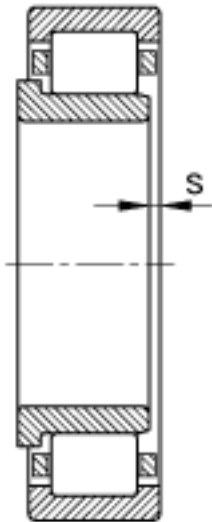

参考资料:<http://www.sozhou.com/p/495dfe9f.html>