


FAG 23268-B-K-MB + AH3268G参数

尺寸	d_{1H}	320	mm	-	
	D	620	mm	-	
	B	224	mm	-	
	a	9	mm	-	
	b	38	mm	-	
	D_1	521.2	mm	-	
	$D_{a \max}$	594	mm	-	
	d	340	mm	-	
	d_{2G}	Tr360x5		-	
	$d_{a \min}$	366	mm	-	
	d_s	12.5	mm	-	
	l	264	mm	-	
	n_s	23.5	mm	-	
	$r_{a \max}$	5	mm	-	
	r_{\min}	6	mm	-	
	说明		AH3268G		型号, 退卸套
	重量	m	291000	g	质量
m_1		33600	g	质量, 退卸套	
基本额定载荷	C_r	4500000	N	基本额定动载荷, 径向	
计算系数	e	0.38		-	
	Y_1	1.78		-	
	Y_2	2.65		-	
基本额定载荷	C_{0r}	8150000	N	基本额定静载荷, 径向	
计算系数	Y_0	1.74		-	
极限转速	n_G	980	r/min	极限转速	
参考转速	n_B	470	r/min	参考速度	
疲劳极限载荷	C_{ur}	650000	N	疲劳极限载荷, 径向	

FAG 23268-B-K-MB + AH3268G图片

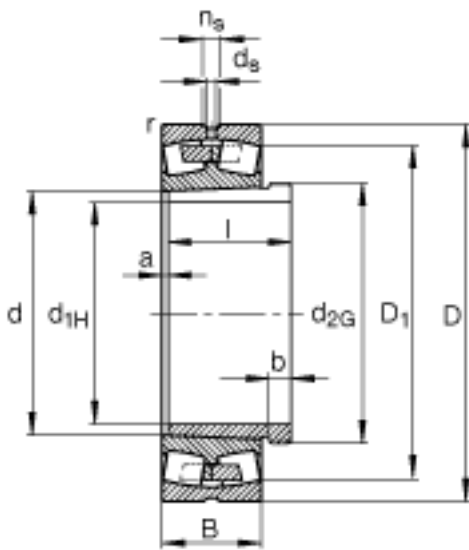

参考资料:<http://www.sozhou.com/p/51d68a05.html>