
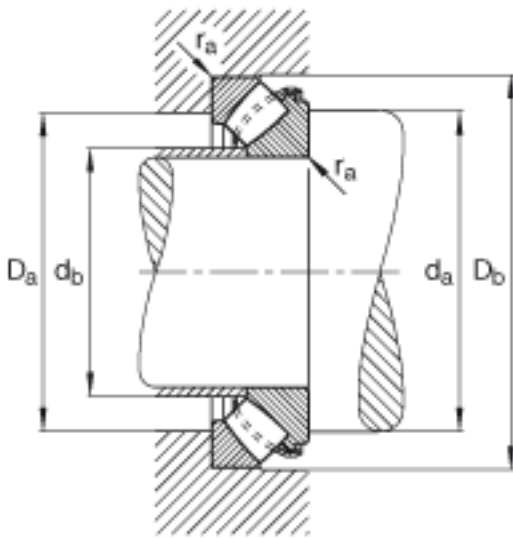


FAG 29334-E1参数

尺寸	$d_{b \max}$	180	mm	-
	$d_{b1 \max}$	188	mm	-
	D	280	mm	-
	T	67	mm	-
	A	96	mm	-
	D_1	215	mm	-
	$D_{a \max}$	247	mm	-
	$D_{b \min}$	284	mm	-
	d_1	255.7	mm	-
	$d_{a \min}$	220	mm	-
	d	170	mm	-
	$r_{a \max}$	2.5	mm	-
	r_{\min}	3	mm	-
	T_1	30.5	mm	-
	T_3	42.2	mm	-
	T_5	60.5	mm	-
重量	m	14200	g	质量
基本额定载荷	C_a	1230000	N	基本额定动载荷, 轴向
	C_{0a}	3500000	N	基本额定静载荷, 轴向
极限转速	n_G	2380	r/min	极限转速
参考转速	n_B	1260	r/min	参考速度
疲劳极限载荷	C_{ua}	450000	N	疲劳极限载荷, 轴向

FAG 29334-E1图片

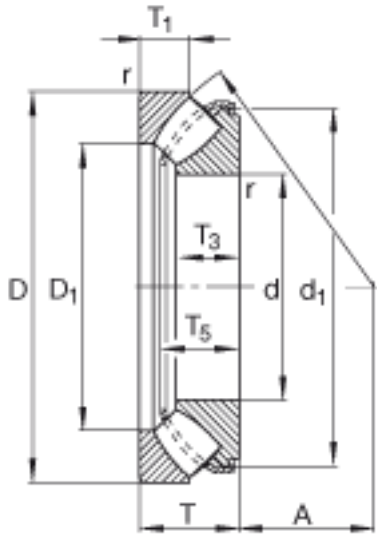

参考资料:<http://www.sozhou.com/p/55ed9d20.html>

