
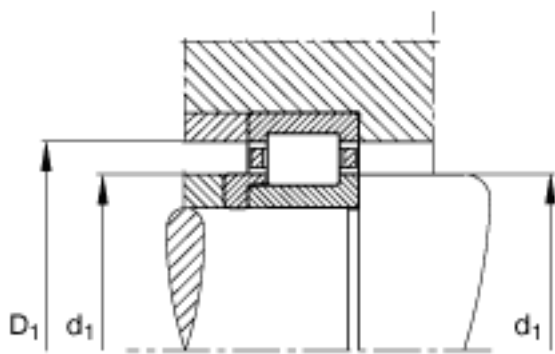


FAG NJ422-M1 + HJ422参数

参考转速	n_B	2550	r/min	参考速度
疲劳极限载荷	C_{ur}	105000	N	疲劳极限载荷，径向
尺寸	d	110	mm	-
	D	280	mm	-
	B	65	mm	-
	B_1	17	mm	-
	B_2	29.5	mm	-
	D_1	220.9	mm	-
	$D_{a\ max}$	260	mm	-
	d_1	170.3	mm	-
	$d_{a\ max}$	153	mm	-
	$d_{a\ min}$	130	mm	-
	$d_{c\ min}$	173	mm	-
	E	235	mm	-
	F	155	mm	-
	$r_{l\ min}$	4	mm	-
	$r_{a\ max}$	3	mm	-
	$r_{al\ max}$	3	mm	-
	r_{min}	4	mm	-
	s	6.2	mm	距离中心位置的轴向偏移
说明		HJ422		型号，L 型圈
重量	m	22800	g	质量
基本额定载荷	C_r	680000	N	基本额定动载荷，径向
	C_{0r}	660000	N	基本额定静载荷，径向
极限转速	n_G	3850	r/min	极限转速
重量	m_1	2100	g	质量，L 型圈

FAG NJ422-M1 + HJ422图片

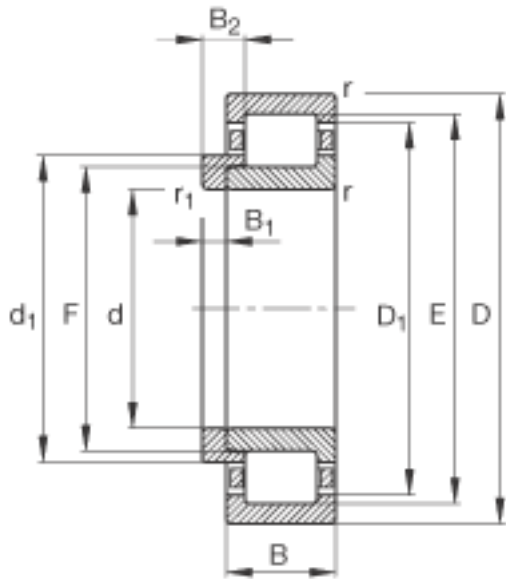

参考资料:<http://www.sozhou.com/p/56fbba0b.html>

