


FAG NJ211-E-TVP2 + HJ211-E参数

尺寸	$d_{a \min}$	62	mm	-
	$d_{c \min}$	73	mm	-
	E	90	mm	-
	F	66	mm	-
	$r_{1 \min}$	1.1	mm	-
	$r_{a \max}$	1.5	mm	-
	$r_{a1 \max}$	1	mm	-
	$r_{\min}$	1.5	mm	-
	s	0.8	mm	距离中心位置的轴向偏移
说明		HJ211-E		型号, L 型圈
重量	m	679	g	质量
	$m_1$	87	g	质量, L 型圈
基本额定载荷	$C_r$	99000	N	基本额定动载荷, 径向
尺寸	d	55	mm	-
	D	100	mm	-
	B	21	mm	-
	$B_1$	6	mm	-
	$B_2$	9.5	mm	-
	$D_1$	86.6	mm	-
	$D_{a \max}$	91	mm	-
	$d_1$	70.8	mm	-
	$d_{a \max}$	65	mm	-
参考转速	$n_B$	5800	r/min	参考速度
疲劳极限载荷	$C_{ur}$	16100	N	疲劳极限载荷, 径向
基本额定静载荷	$C_{0r}$	95000	N	基本额定静载荷, 径向
极限转速	$n_G$	8700	r/min	极限转速

FAG NJ211-E-TVP2 + HJ211-E图片

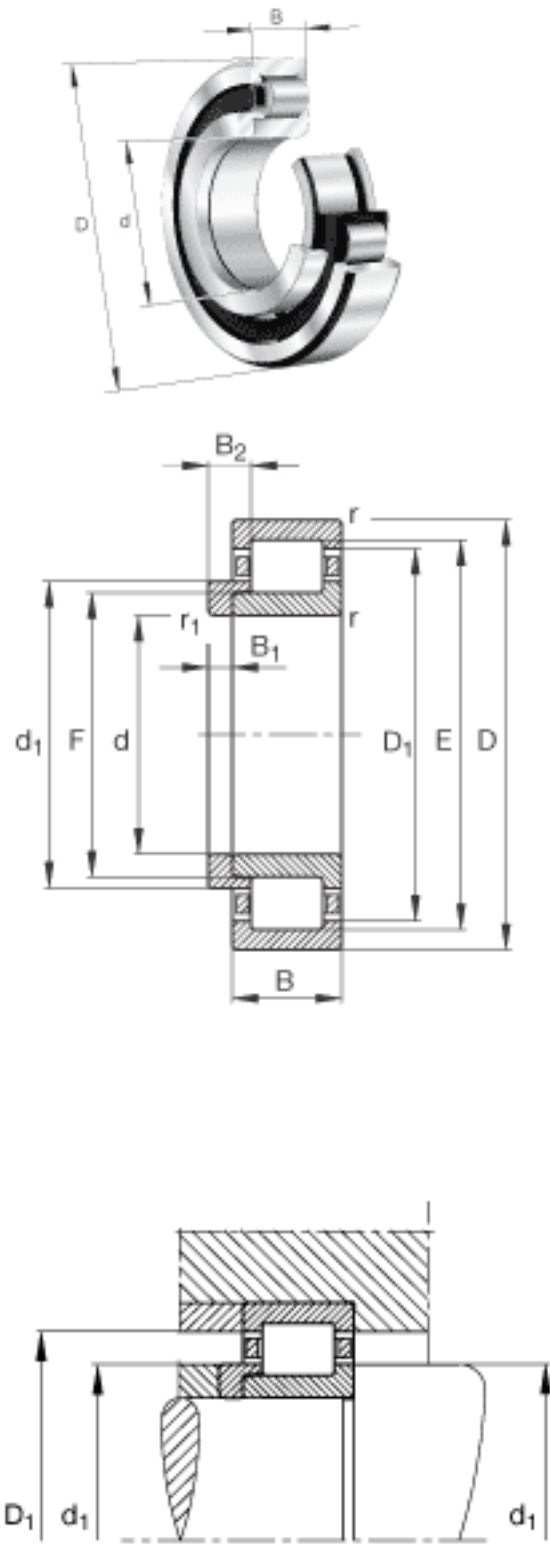

参考资料:<http://www.sozhou.com/p/5ab69ec0.html>

