
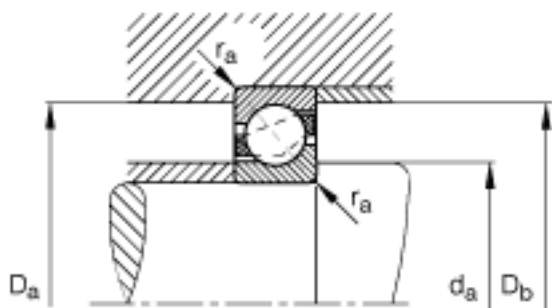


## FAG 7207-B-JP参数

|        |                     |       |       |            |
|--------|---------------------|-------|-------|------------|
| 尺寸     | d                   | 35    | mm    | -          |
|        | D                   | 72    | mm    | -          |
|        | B                   | 17    | mm    | -          |
|        | a                   | 31    | mm    | -          |
|        | D <sub>1</sub>      | 57.6  | mm    | -          |
|        | D <sub>a max</sub>  | 65    | mm    | -          |
|        | D <sub>b max</sub>  | 67.8  | mm    | -          |
|        | d <sub>1</sub>      | 50.2  | mm    | -          |
|        | d <sub>a min</sub>  | 42    | mm    | -          |
|        | r <sub>1 min</sub>  | 0.6   | mm    | -          |
|        | r <sub>a max</sub>  | 1     | mm    | -          |
|        | r <sub>a1 max</sub> | 0.6   | mm    | -          |
|        | r <sub>min</sub>    | 1.1   | mm    | -          |
|        | 重量                  | m     | 290   | g          |
| 基本额定载荷 | C <sub>r</sub>      | 28000 | N     | 基本额定动载荷，径向 |
| 计算系数   | e                   | 1.14  |       | -          |
|        | X                   | 0.35  |       | -          |
|        | Y                   | 0.57  |       | -          |
|        | Y <sub>0</sub>      | 0.26  |       | -          |
| 基本额定载荷 | C <sub>0r</sub>     | 19000 | N     | 基本额定静载荷，径向 |
| 极限转速   | n <sub>G</sub>      | 12200 | r/min | 极限转速       |
| 参考转速   | n <sub>B</sub>      | 9600  | r/min | 参考速度       |
| 疲劳极限载荷 | C <sub>ur</sub>     | 1280  | N     | 疲劳极限载荷，径向  |

## FAG 7207-B-JP图片

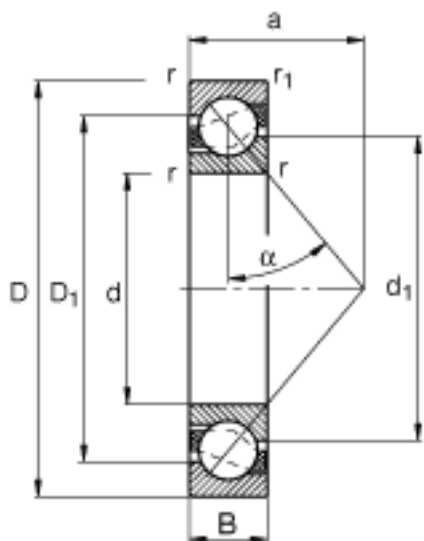

参考资料: <http://www.sozhou.com/p/6395dc8c.html>