


SKF NRT 180 A参数

主要尺寸	d	180	mm	-
	D	280	mm	-
	H	43	mm	-
基本额定载荷	C	89700	N	动载荷
	C_0	236000	N	静载荷
	C	80000	N	动载荷
	C_0	560000	N	静载荷
极限转速	Grease lubrication	190	r/min	-
	Oil lubrication	380	r/min	-
Guideline rotary table diameter	Guideline rotary table diameter	400	mm	-
重量	重量	7700	g	-
型号	型号	NRT 180 A	-	-

SKF NRT 180 A图片

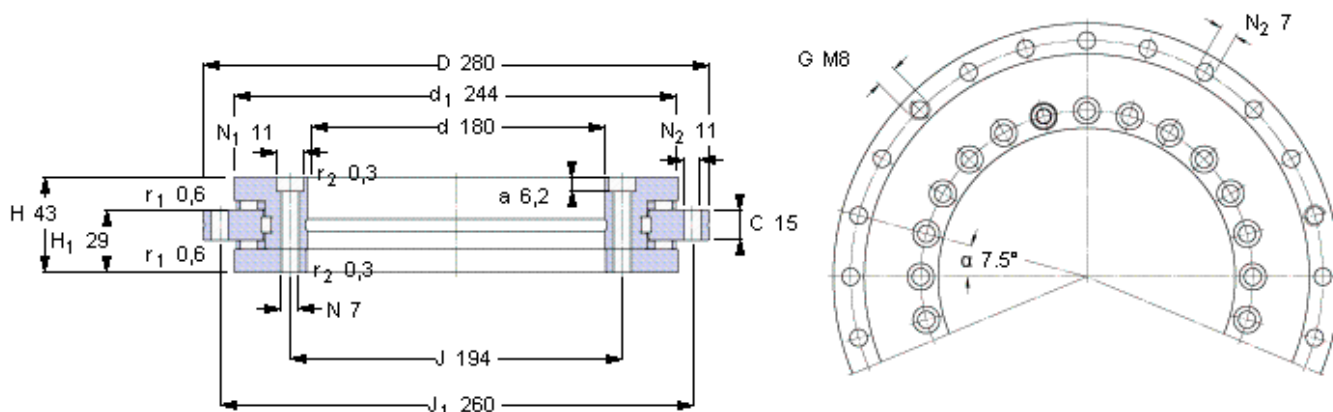

Axial preload [kN] (average value)	2,5
Axial unloading force [kN] (average value)	5,5
Frictional moment C_{RL} [Nm] (guideline value)	13
Stiffness (values refer to the roller set)	
Axial [kN/ μ m]	10,3
Radial [kN/ μ m]	5,8
Movement [kNm/mrad]	53



Retaining bolts 2 x M6 , 180°

Removal threads G 3 x M8 , 120°

Required attachment bolts

Shaft (no. of bolts x pitch) 46 x 7.5°
with 2 positions omitted at 180° apart at retaining bolt positions
Housing (no. of bolts x pitch) 45 x 7.5°
with 3 positions omitted at 120° apart at removal thread positions

Recommended tightening torque for attachment bolts grade 10.9 [Nm]
14 (M6)

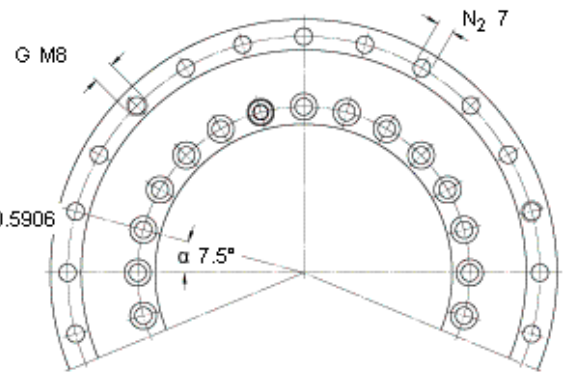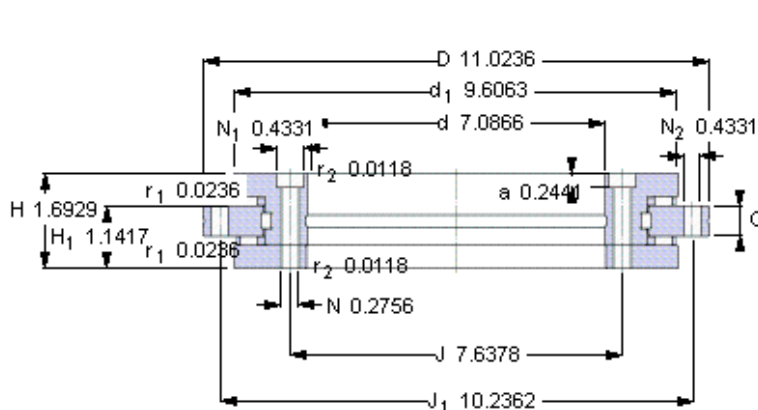

Axial preload [kN] 2,5
(average value)

Axial unloading force [kN] 5,5
(average value)

Frictional moment C_{RL} [Nm] 13
(guideline value)

Stiffness

(values refer to the roller set)

Axial [kN/ μ m] 10,3

Radial [kN/ μ m] 5,8

Movement [kNm/mrad] 53

Retaining bolts 2 x M6 , 180°

Removal threads G 3 x M8 , 120°

Required attachment bolts

Shaft (no. of bolts x pitch) 46 x 7.5°

with 2 positions omitted at 180° apart at retaining bolt positions

Housing (no. of bolts x pitch) 45 x 7.5°

with 3 positions omitted at 120° apart at removal thread positions

Recommended tightening torque for attachment bolts grade 10.9 [Nm]

0.551 ζ (M6)

参考资料: <http://www.sozhou.com/p/785885fc.html>