
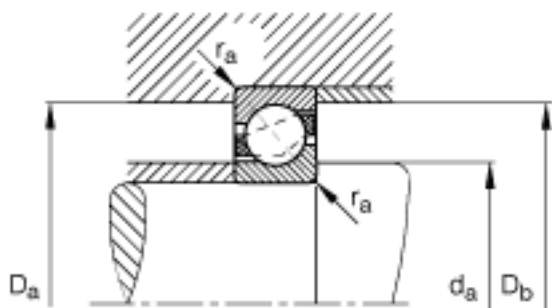


FAG 7216-B-JP参数

尺寸	r_{\min}	2	mm	-
重量	m	1530	g	质量
基本额定载荷	C_r	85000	N	基本额定动载荷，径向
计算系数	e	1.14		-
	X	0.35		-
	Y	0.57		-
	Y_0	0.26		-
基本额定载荷	C_{0r}	72000	N	基本额定静载荷，径向
极限转速	n_G	5800	r/min	极限转速
参考转速	n_B	4950	r/min	参考速度
疲劳极限载荷	C_{ur}	4650	N	疲劳极限载荷，径向
尺寸	d	80	mm	-
	D	140	mm	-
	B	26	mm	-
	a	59	mm	-
	D_1	117.2	mm	-
	$D_{a \max}$	129	mm	-
	$D_{b \max}$	134.4	mm	-
	d_1	102.9	mm	-
	$d_{a \min}$	91	mm	-
	$r_{1 \min}$	1	mm	-
	$r_{a \max}$	2	mm	-
	$r_{a1 \max}$	1	mm	-

FAG 7216-B-JP图片

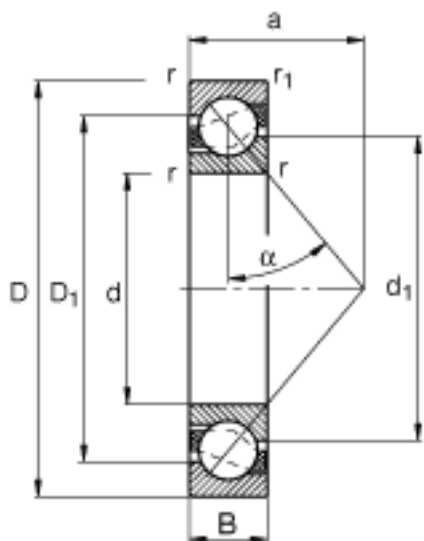

参考资料: <http://www.sozhou.com/p/7a874208.html>