


SKF NRT 80 A参数

主要尺寸	d	80	mm	-
	D	146	mm	-
	H	35	mm	-
基本额定载荷	C	55000	N	动载荷
	C_0	102000	N	静载荷
	C	37500	N	动载荷
	C_0	200000	N	静载荷
极限转速	Grease lubrication	350	r/min	-
	Oil lubrication	700	r/min	-
Guideline rotary table diameter	Guideline rotary table diameter	200	mm	-
重量	重量	2400	g	-
型号	型号	NRT 80 A	-	-

SKF NRT 80 A图片

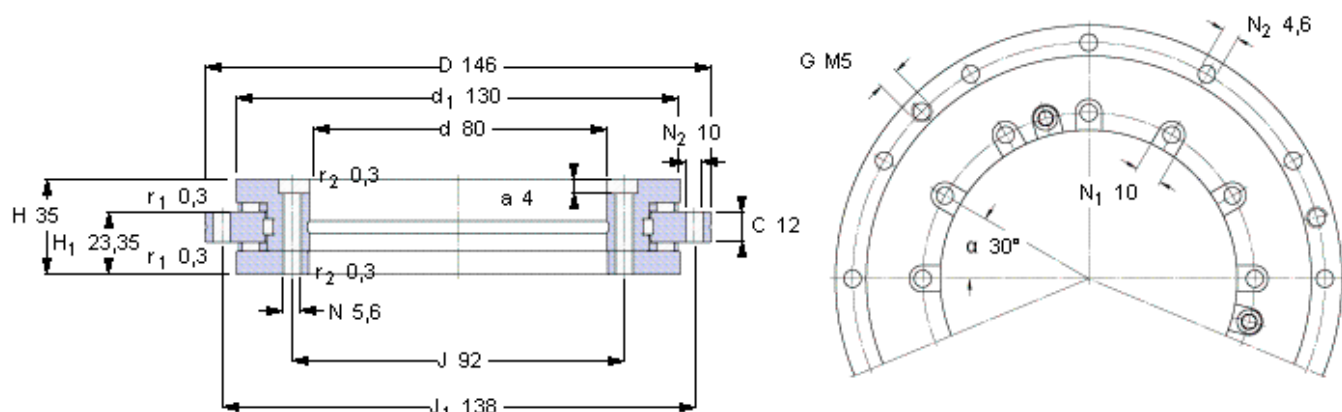

Axial preload [kN] 1,3
(average value)

Axial unloading force [kN] 2,8
(average value)

Frictional moment C_{RL} [Nm] 3
(guideline value)

Stiffness

(values refer to the roller set)

Axial [kN/ μ m] 4,9

Radial [kN/ μ m] 3,1

Movement [kNm/mrad] 7

Retaining bolts 3 x M5 , 120°

Removal threads G 3 x M5 , 120°

Required attachment bolts



Shaft (no. of bolts x pitch) 12 x 30°

Housing (no. of bolts x pitch) 12 x 30°

Recommended tightening torque for attachment bolts grade 10.9 [Nm]

轴 8,5 (M5)

轴承座 4,5 (M4)

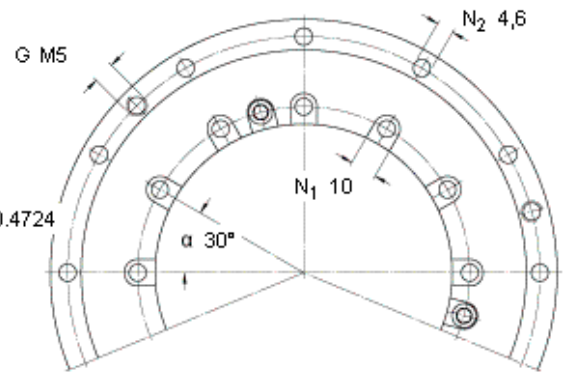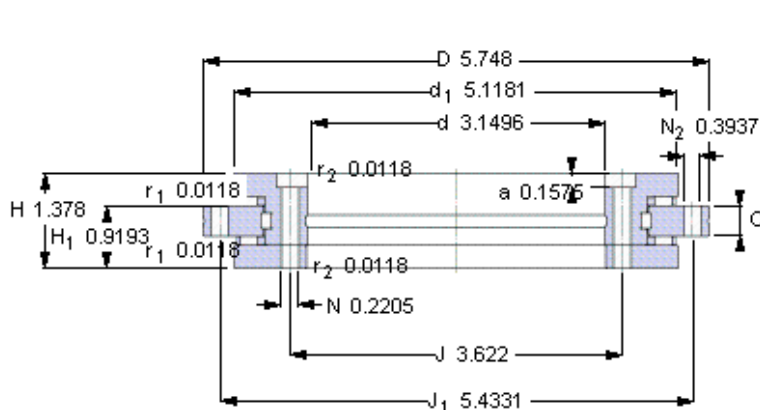

Axial preload [kN] 1,3
(average value)

Axial unloading force [kN] 2,8
(average value)

Frictional moment C_{RL} [Nm] 3
(guideline value)

Stiffness
(values refer to the roller set)

Axial [kN/ μ m] 4,9
Radial [kN/ μ m] 3,1
Movement [kNm/mrad] 7

Retaining bolts 3 x M5 , 120°

Removal threads G 3 x M5 , 120°

Required attachment bolts

Shaft (no. of bolts x pitch) 12 x 30°
Housing (no. of bolts x pitch) 12 x 30°

Recommended tightening torque for attachment bolts grade 10.9 [Nm]

轴 0.3346 (M5)
轴承座 0.1772 (M4)

参考资料: <http://www.sozhou.com/p/8114851a.html>