
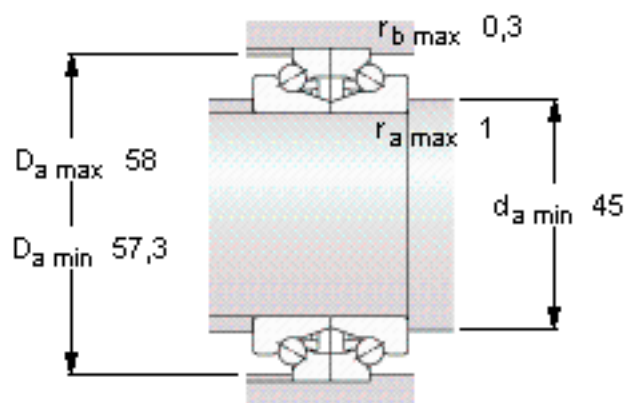


SKF BTW 35 CTN9/SP参数

主要尺寸	d	35	mm	-
	D	62	mm	-
	H	34	mm	-
基本额定载荷	C	16800	N	动载荷
	C_0	39000	N	静载荷
疲劳载荷极限	P_u	1830	N	-
可达转速	Grease	11000	r/min	-
	Oil-air	14000	r/min	-
重量	重量	350	g	-
型号	型号	BTW 35 CTN9/SP	-	-

SKF BTW 35 CTN9/SP图片

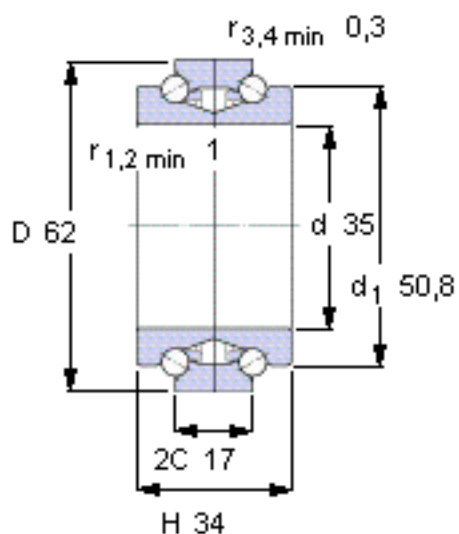

未安装时的预载荷 [N]

340

Reference grease min quantity [cm³]


G_{ref} 1,9

Static axial stiffness [N/μm]

(guideline value)

455

参考资料:<http://www.sozhou.com/p/8500b18c.html>

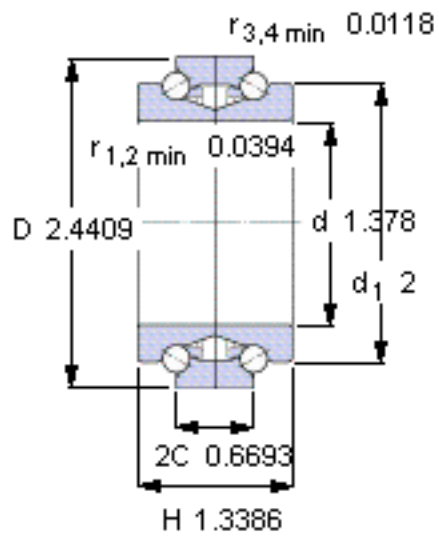


未安装时的预载荷 [N]

340

Reference grease quantity [cm³]

G_{ref} 1,9

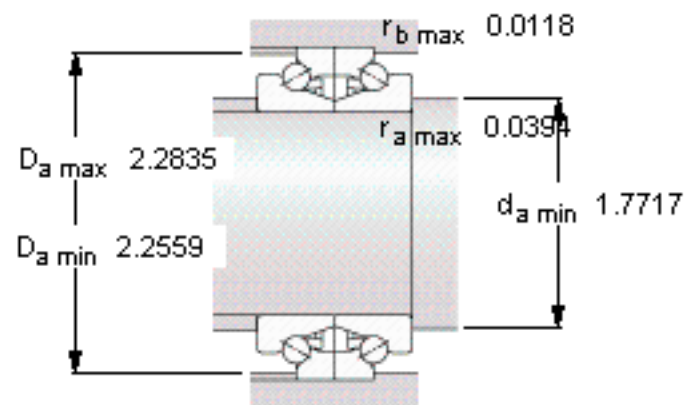

Static axial stiffness [N/μm]

(guideline value)

455