
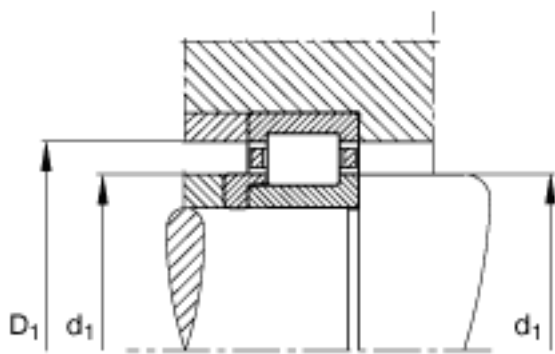


FAG NJ206-E-TVP2 + HJ206-E参数

基本额定载荷	$C_{0r}$	37500	N	基本额定静载荷，径向	
极限转速	$n_G$	14200	r/min	极限转速	
参考转速	$n_B$	9800	r/min	参考速度	
疲劳极限载荷	$C_{ur}$	5400	N	疲劳极限载荷，径向	
尺寸	d	30	mm	-	
	D	62	mm	-	
	B	16	mm	-	
	$B_1$	4	mm	-	
	$B_2$	7	mm	-	
	$D_1$	52.5	mm	-	
	$D_{a\ max}$	56	mm	-	
	$d_1$	41.1	mm	-	
	$d_{a\ max}$	37	mm	-	
	$d_{a\ min}$	34	mm	-	
	$d_{c\ min}$	44	mm	-	
	E	55.5	mm	-	
	F	37.5	mm	-	
	$r_{1\ min}$	0.6	mm	-	
	$r_{a\ max}$	1	mm	-	
	$r_{al\ max}$	0.6	mm	-	
	$r_{min}$	1	mm	-	
		s	1.5	mm	距离中心位置的轴向偏移
	说明		HJ206-E		型号，L 型圈
重量	m	213	g	质量	
	$m_1$	24	g	质量，L 型圈	
基本额定载荷	$C_r$	46000	N	基本额定动载荷，径向	

FAG NJ206-E-TVP2 + HJ206-E图片

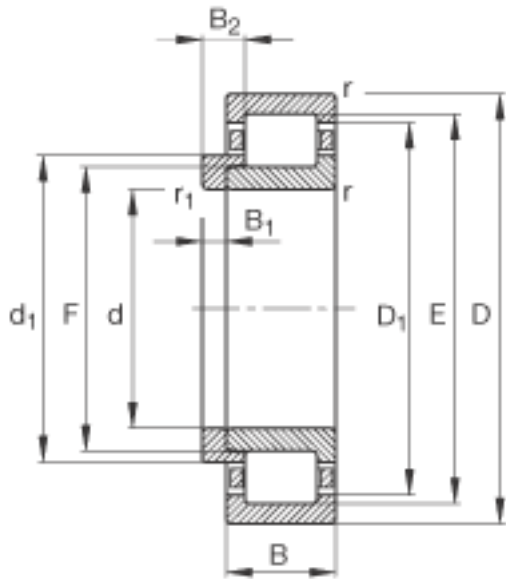

参考资料:<http://www.sozhou.com/p/8873aff4.html>

