
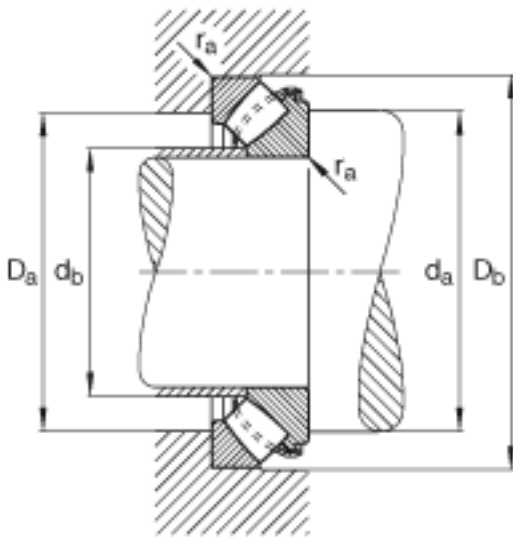


### FAG 29412-E1参数

尺寸	d	60	mm	-
	D	130	mm	-
	T	42	mm	-
	A	38	mm	-
	D <sub>1</sub>	85.5	mm	-
	D <sub>a max</sub>	107	mm	-
	D <sub>b min</sub>	133	mm	-
	d <sub>1</sub>	116.5	mm	-
	d <sub>a min</sub>	95	mm	-
	d <sub>b max</sub>	67	mm	-
	r <sub>a max</sub>	1.5	mm	-
	r <sub>min</sub>	1.5	mm	-
	T <sub>1</sub>	21	mm	-
	T <sub>3</sub>	27	mm	-
	T <sub>5</sub>	37.5	mm	-
重量	m	2500	g	质量
基本额定载荷	C <sub>a</sub>	410000	N	基本额定动载荷, 轴向
	C <sub>0a</sub>	940000	N	基本额定静载荷, 轴向
极限转速	n <sub>G</sub>	5900	r/min	极限转速
参考转速	n <sub>B</sub>	2800	r/min	参考速度
疲劳极限载荷	C <sub>ua</sub>	113000	N	疲劳极限载荷, 轴向

### FAG 29412-E1图片

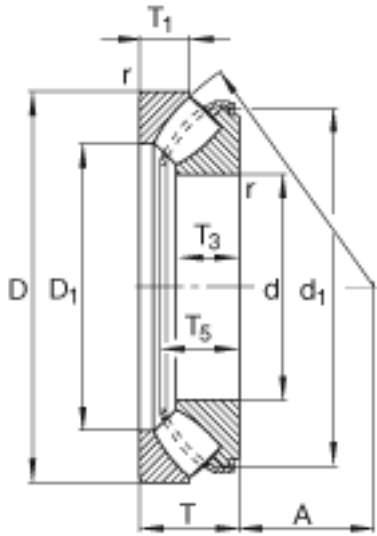

参考资料:<http://www.sozhou.com/p/9f183656.html>

