


FAG 23260-K-MB + H3260参数

|        |              |         |       |             |
|--------|--------------|---------|-------|-------------|
| 尺寸     | $d_{1H}$     | 280     | mm    | -           |
|        | D            | 540     | mm    | -           |
|        | B            | 192     | mm    | -           |
|        | $B_{a \min}$ | 12      | mm    | -           |
|        | c            | 40      | mm    | -           |
|        | $c_1$        | 53      | mm    | -           |
|        | $D_1$        | 458.7   | mm    | -           |
|        | $D_{a \max}$ | 520     | mm    | -           |
|        | $D_m$        | 380     | mm    | -           |
|        | d            | 300     | mm    | -           |
|        | $d_{a \max}$ | 353     | mm    | -           |
|        | $d_{b \min}$ | 321     | mm    | -           |
|        | $d_s$        | 12.5    | mm    | -           |
|        | l            | 240     | mm    | -           |
|        | $n_s$        | 23.5    | mm    | -           |
|        | $r_{a \max}$ | 4       | mm    | -           |
|        | $r_{\min}$   | 5       | mm    | -           |
| 说明     |              | H3260   |       | 质量, 紧定套     |
| 重量     | m            | 192000  | g     | 质量          |
|        | $m_1$        | 34700   | g     | 质量, 紧定套     |
| 基本额定载荷 | $C_r$        | 3450000 | N     | 基本额定动载荷, 径向 |
| 计算系数   | e            | 0.37    |       | -           |
|        | $Y_1$        | 1.83    |       | -           |
|        | $Y_2$        | 2.72    |       | -           |
| 基本额定载荷 | $C_{0r}$     | 6200000 | N     | 基本额定静载荷, 径向 |
| 计算系数   | $Y_0$        | 1.79    |       | -           |
| 极限转速   | $n_G$        | 1170    | r/min | 极限转速        |

|        |          |        |       |           |
|--------|----------|--------|-------|-----------|
| 参考转速   | $n_B$    | 560    | r/min | 参考速度      |
| 疲劳极限载荷 | $C_{ur}$ | 300000 | N     | 疲劳极限载荷，径向 |

FAG 23260-K-MB + H3260图片

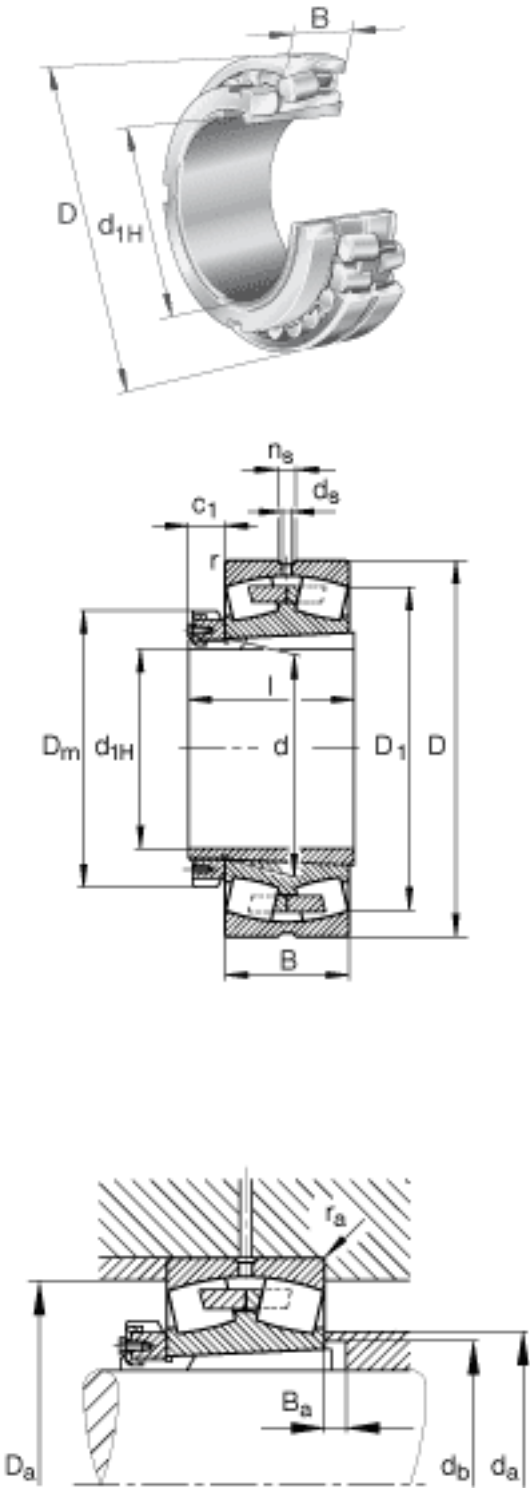

参考资料:<http://www.sozhou.com/p/a165fb5f.html>