
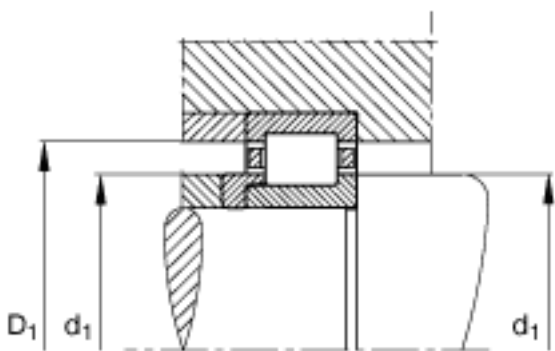


FAG NJ216-E-TVP2 + HJ216-E参数

尺寸	$d_{a\ min}$	91	mm	-
	$d_{c\ min}$	104	mm	-
	E	127.3	mm	-
	F	95.3	mm	-
	$r_{l\ min}$	2	mm	-
	$r_{a\ max}$	2	mm	-
	$r_{a1\ max}$	2	mm	-
	r_{min}	2	mm	-
	s	1.3	mm	距离中心位置的轴向偏移
说明		HJ216-E		型号, L 型圈
重量	m	1580	g	质量
	m_1	220	g	质量, L 型圈
基本额定载荷	C_r	166000	N	基本额定动载荷, 径向
	C_{0r}	168000	N	基本额定静载荷, 径向
极限转速	n_G	6100	r/min	极限转速
参考转速	n_B	4250	r/min	参考速度
疲劳极限载荷	C_{ur}	29000	N	疲劳极限载荷, 径向
尺寸	d	80	mm	-
	D	140	mm	-
	B	26	mm	-
	B_1	8	mm	-
	B_2	12.5	mm	-
	D_1	122.9	mm	-
	$D_{a\ max}$	129	mm	-
	d_1	101.5	mm	-
	$d_{a\ max}$	94	mm	-

FAG NJ216-E-TVP2 + HJ216-E图片

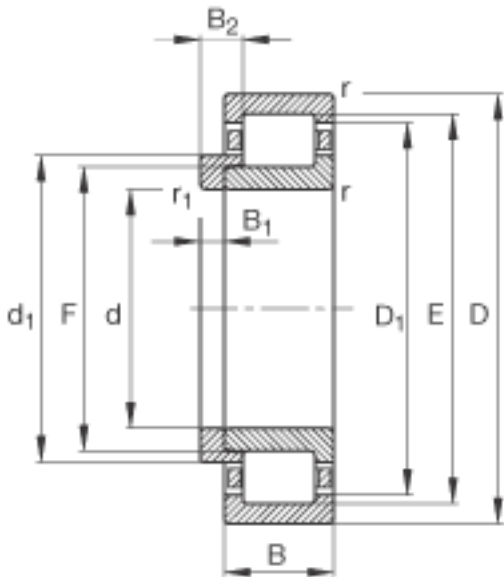

参考资料:<http://www.sozhou.com/p/afe37e05.html>

