
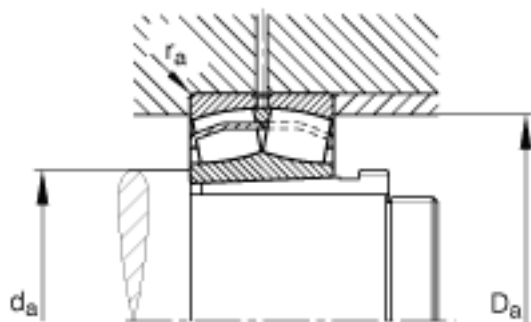
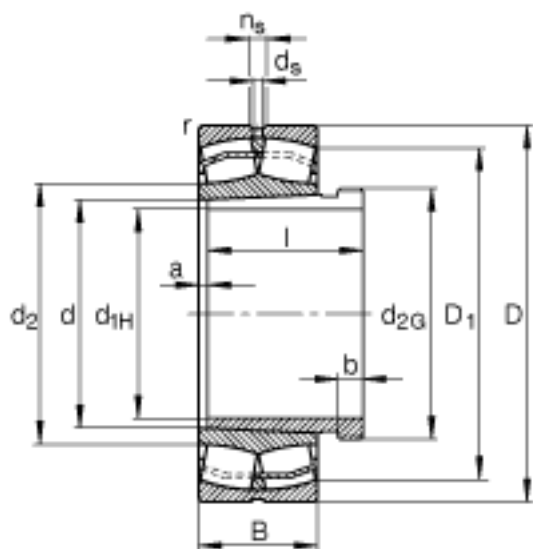


FAG 23234-E1-K-TVPB + AH3234G参数

尺寸	d_{1H}	160	mm	-	
	D	310	mm	-	
	B	110	mm	-	
	a	6	mm	-	
	b	24	mm	-	
	D_1	267.4	mm	-	
	$D_{a\ max}$	293	mm	-	
	d	170	mm	-	
	d_2	199.8	mm	-	
	d_{2G}	M180x3		-	
	$d_{a\ min}$	187	mm	-	
	d_s	8	mm	-	
	l	134	mm	-	
	n_s	15	mm	-	
	$r_{a\ max}$	3	mm	-	
	r_{min}	4	mm	-	
	说明		AH3234G		型号, 退卸套
	重量	m	33100	g	质量
m_1		4290	g	质量, 退卸套	
基本额定载荷	C_r	1640000	N	基本额定动载荷, 径向	
计算系数	e	0.33		-	
	Y_1	2.03		-	
	Y_2	3.02		-	
基本额定载荷	C_{0r}	2170000	N	基本额定静载荷, 径向	
计算系数	Y_0	1.98		-	
极限转速	n_G	2090	r/min	极限转速	
参考转速	n_B	1190	r/min	参考速度	
疲劳极限载荷	C_{ur}	163000	N	疲劳极限载荷, 径向	

FAG 23234-E1-K-TVPB + AH3234G图片

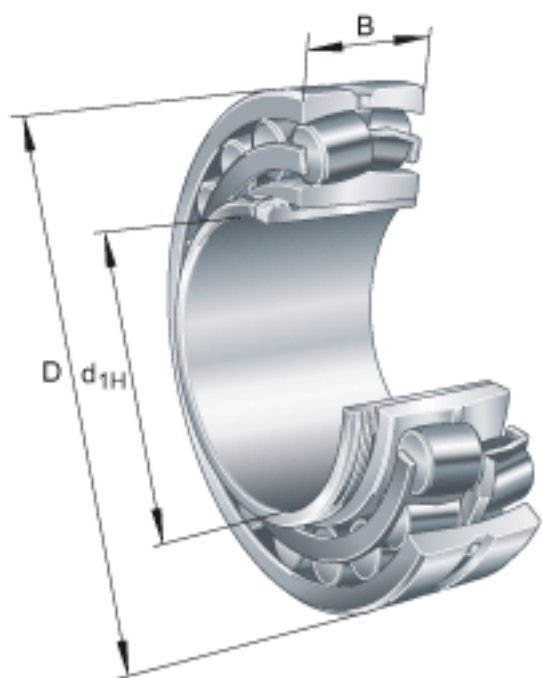

参考资料:<http://www.sozhou.com/p/b0a54c80.html>