


SKF BSA 215 C参数

主要尺寸	d	75	mm	-
	D	130	mm	-
	H	25	mm	-
基本额定载荷	C	72000	N	动载荷
	C_0	245000	N	静载荷
疲劳载荷极限	P_u	9150	N	-
可达转速	Grease lubrication	4300	r/min	-
	Oil-air lubrication	5000	r/min	-
重量	重量	1450	g	-
型号	型号	BSA 215 C	-	-

SKF BSA 215 C图片

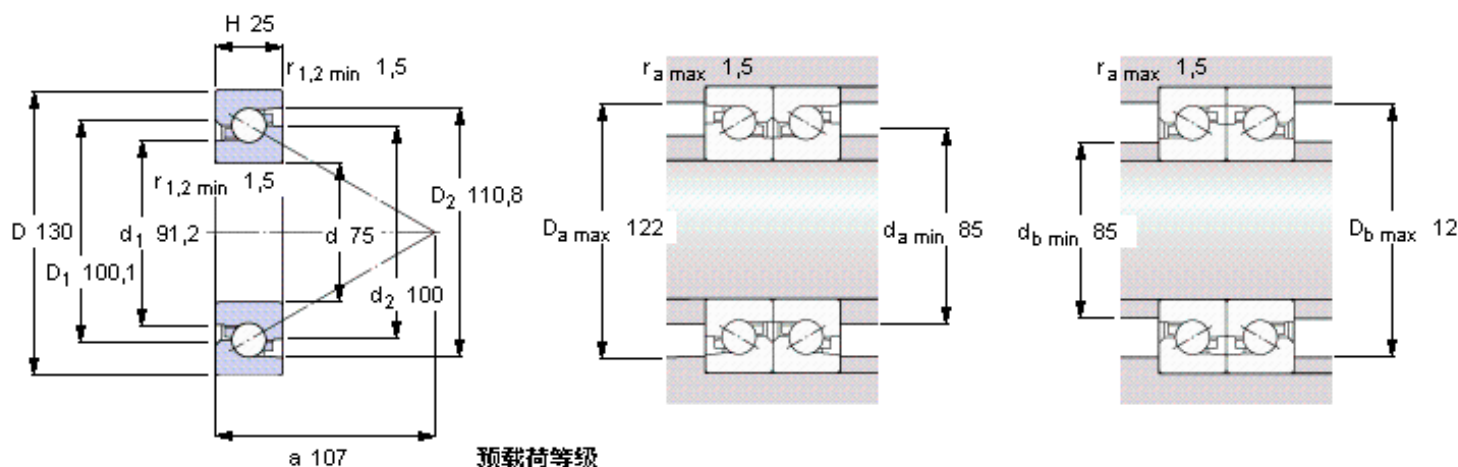

Preload¹⁾ [N]

Frictional moment¹⁾ [Nm]
(guideline value)

Static axial stiffness¹⁾ [N/μm]
(guideline value)

预载荷等级




	A	B
Preload ¹⁾ [N]	6850	13700
Frictional moment ¹⁾ [Nm] (guideline value)	0,65	1,4
Static axial stiffness ¹⁾ [N/μm] (guideline value)	1870	2380

Max. axial load carrying capacity
(guideline value)

Reference grease quantity [cm³]
 G_{ref} 11

¹⁾ Values apply to unmounted bearing set with two bearings arranged back-to-back or face-to-face

参考资料: <http://www.sozhou.com/p/ba41e1ee.html>

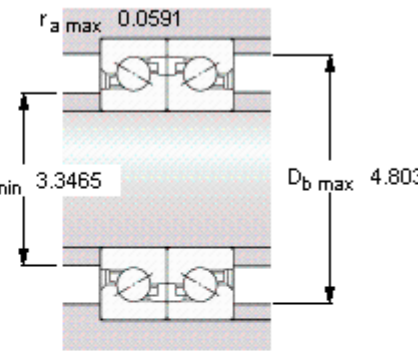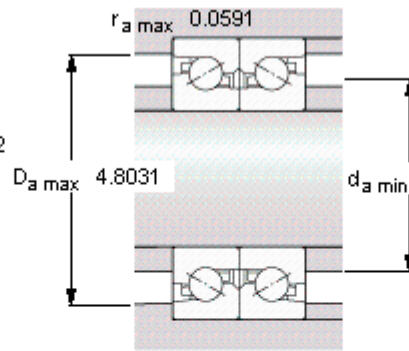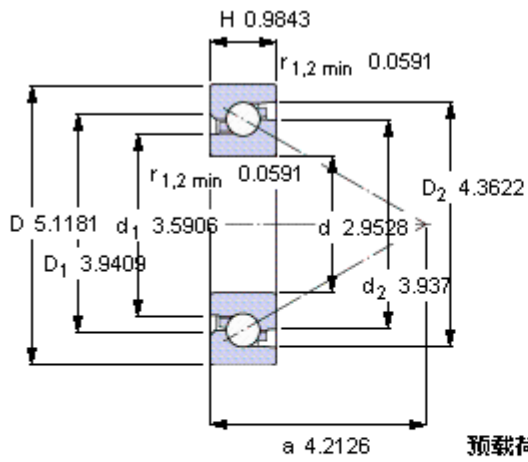

预载荷等级

Preload¹⁾ [N]

Frictional moment¹⁾ [Nm]

(guideline value)

Static axial stiffness¹⁾ [N/μm]

(guideline value)

A 6850

B 13700

0,65

1,4

1870

2380

Max. axial load carrying capacity

(guideline value)

76

Reference grease quantity [cm³]

G_{ref} 11

¹⁾ Values apply to unmounted bearing set with two bearings arranged back-to-back or face-to-face