
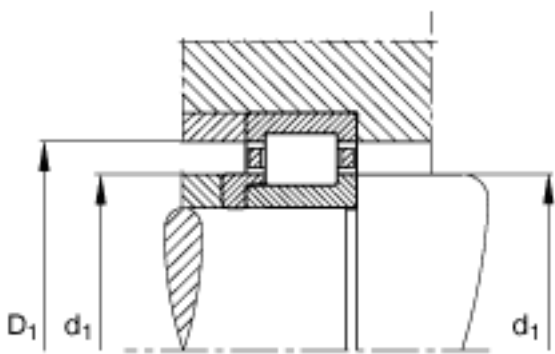


FAG NJ2330-E-M1 + HJ2330-E参数

尺寸	d	150	mm	-	
	D	320	mm	-	
	B	108	mm	-	
	B <sub>1</sub>	15	mm	-	
	B <sub>2</sub>	31.5	mm	-	
	D <sub>1</sub>	269.8	mm	-	
	D <sub>a max</sub>	303	mm	-	
	d <sub>1</sub>	209.5	mm	-	
	d <sub>a max</sub>	190	mm	-	
	d <sub>a min</sub>	167	mm	-	
	d <sub>c min</sub>	213	mm	-	
	E	283	mm	-	
	F	193	mm	-	
	r <sub>1 min</sub>	4	mm	-	
	r <sub>a max</sub>	3	mm	-	
	r <sub>al max</sub>	3	mm	-	
	r <sub>min</sub>	4	mm	-	
	s	9.7	mm	距离中心位置的轴向偏移	
	说明		HJ2330-E		型号, L 型圈
	重量	m	44100	g	质量
m <sub>1</sub>		2550	g	质量, L 型圈	
基本额定载荷	C <sub>r</sub>	1380000	N	基本额定动载荷, 径向	
	C <sub>0r</sub>	1600000	N	基本额定静载荷, 径向	
极限转速	n <sub>G</sub>	3200	r/min	极限转速	
参考转速	n <sub>B</sub>	1480	r/min	参考速度	
疲劳极限载荷	C <sub>ur</sub>	246000	N	疲劳极限载荷, 径向	

FAG NJ2330-E-M1 + HJ2330-E图片

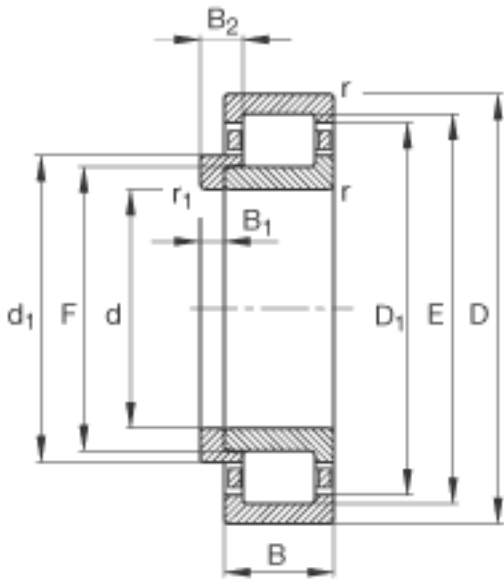

参考资料:<http://www.sozhou.com/p/daa22341.html>

