


SKF NRT 325 A参数

主要尺寸	d	325	mm	-
	D	450	mm	-
	H	60	mm	-
基本额定载荷	C	134000	N	动载荷
	C_0	450000	N	静载荷
	C	153000	N	动载荷
	C_0	1660000	N	静载荷
极限转速	Grease lubrication	110	r/min	-
	Oil lubrication	220	r/min	-
Guideline rotarytable diameter	Guideline rotary table diameter	700	mm	-
重量	重量	25000	g	-
型号	型号	NRT 325 A	-	-

SKF NRT 325 A图片

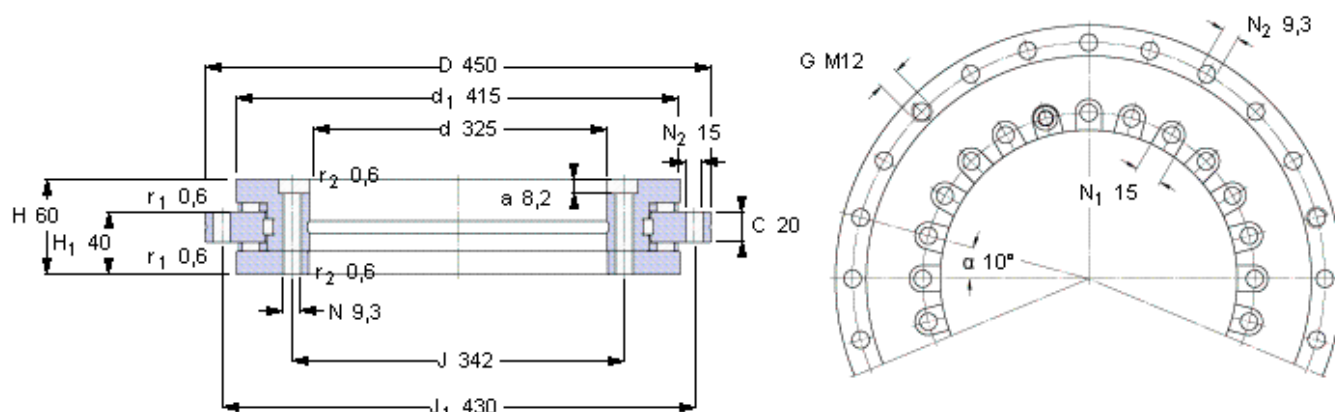

Axial preload [kN] (average value)	12
Axial unloading force [kN] (average value)	26
Frictional moment C_{RL} [Nm] (guideline value)	45
Stiffness (values refer to the roller set)	
Axial [kN/ μ m]	28,6
Radial [kN/ μ m]	8,9
Movement [kNm/mrad]	413



Retaining bolts 2 x M8 , 180°

Removal threads G 3 x M12 , 120°

Required attachment bolts

Shaft (no. of bolts x pitch) 34 x 10°
with 2 positions omitted at 180° apart at retaining bolt positions
Housing (no. of bolts x pitch) 33 x 10°
with 3 positions omitted at 120° apart at removal thread positions

Recommended tightening torque for attachment bolts grade 10.9 [Nm]
34 (M8)

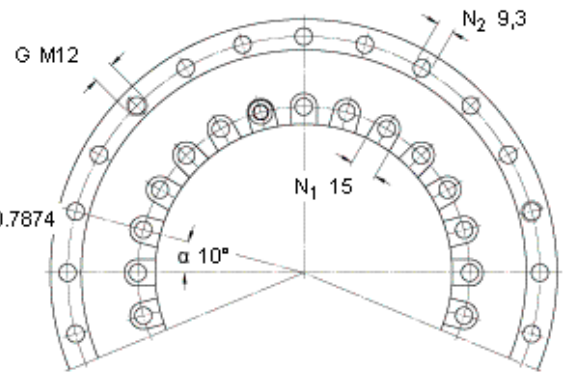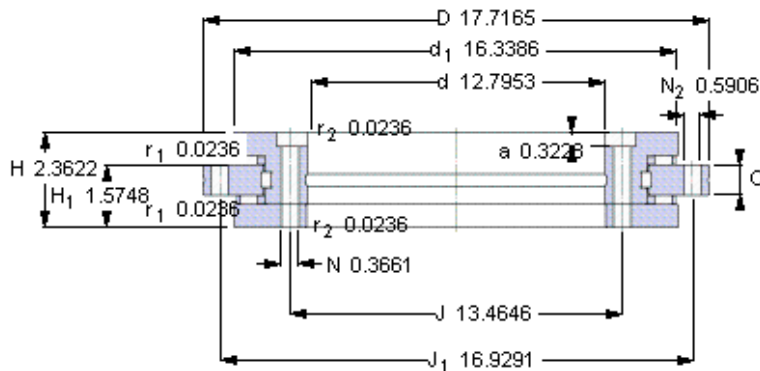

Axial preload [kN] 12
(average value)

Axial unloading force [kN] 26
(average value)

Frictional moment C_{RL} [Nm] 45
(guideline value)

Stiffness
(values refer to the roller set)

Axial [kN/ μ m]	28,6
Radial [kN/ μ m]	8,9
Movement [kNm/mrad]	413

Retaining bolts 2 x M8 , 180°

Removal threads G 3 x M12 , 120°

Required attachment bolts

Shaft (no. of bolts x pitch)	34 x 10°
with 2 positions omitted at 180° apart at retaining bolt positions	
Housing (no. of bolts x pitch)	33 x 10°
with 3 positions omitted at 120° apart at removal thread positions	

Recommended tightening torque for attachment bolts grade 10.9 [Nm]
1.3386 (M8)

参考资料: <http://www.sozhou.com/p/e13252eb.html>