


### SKF BSD 4072 C参数

主要尺寸	d	40	mm	-
	D	72	mm	-
	H	15	mm	-
基本额定载荷	C	36500	N	动载荷
	$C_0$	98000	N	静载荷
疲劳载荷极限	$P_u$	3650	N	-
可达转速	Grease lubrication	7500	r/min	-
	Oil-air lubrication	9000	r/min	-
重量	重量	260	g	-
型号	型号	BSD 4072 C	-	-

### SKF BSD 4072 C图片

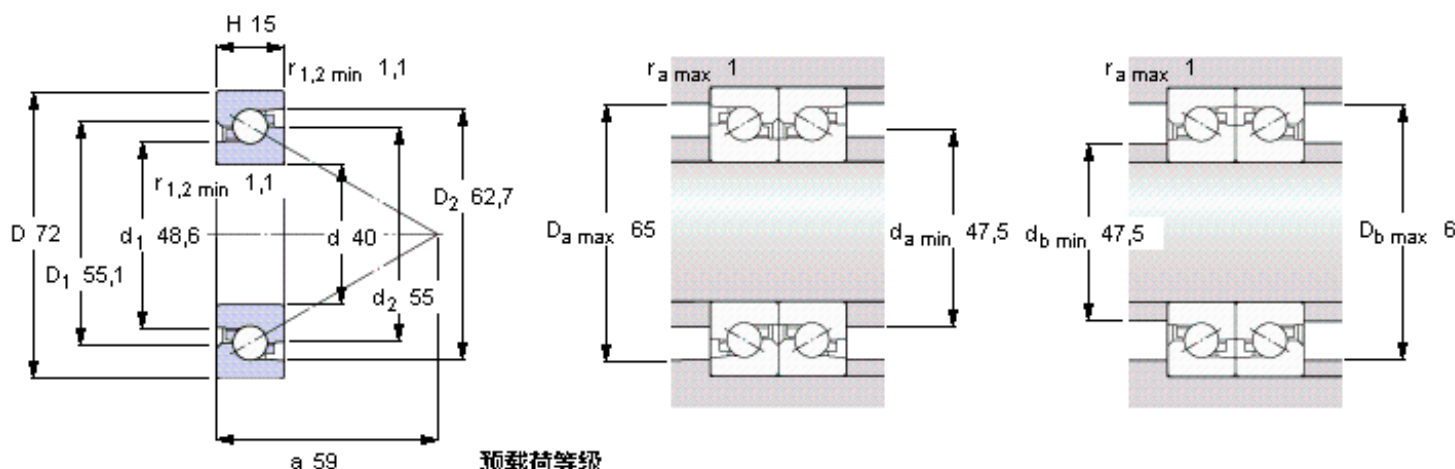

**Preload<sup>1)</sup> [N]**

**Frictional moment<sup>1)</sup> [Nm]**  
(guideline value)

**Static axial stiffness<sup>1)</sup> [N/μm]**  
(guideline value)

**预载荷等级**




	A	B
Preload <sup>1)</sup> [N]	2950	5900
Frictional moment <sup>1)</sup> [Nm] (guideline value)	0,18	0,32
Static axial stiffness <sup>1)</sup> [N/μm] (guideline value)	1080	1370

**Max. axial load carrying capacity**  
(guideline value)  
29,6

**Reference grease quantity [cm<sup>3</sup>]**  
 $G_{ref}$  2,5

<sup>1)</sup> Values apply to unmounted bearing set with two bearings arranged back-to-back or face-to-face

参考资料: <http://www.sozhou.com/p/e489d20b.html>

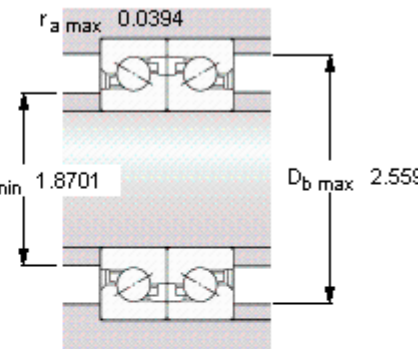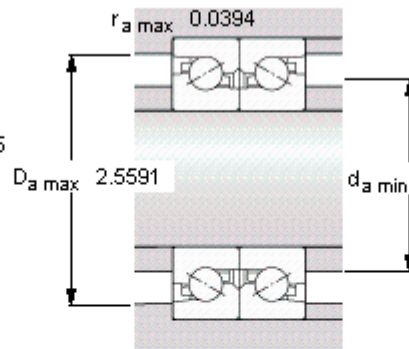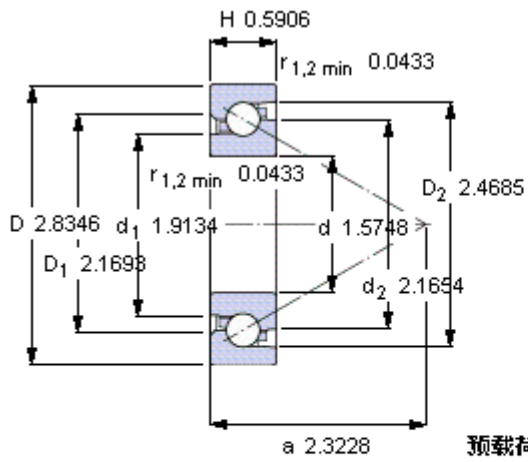

**预载荷等级**

**Preload<sup>1)</sup> [N]**

**Frictional moment<sup>1)</sup> [Nm]**

(guideline value)

**Static axial stiffness<sup>1)</sup> [N/μm]**

(guideline value)

A 2950 B 5900

0,18 0,32

1080 1370

**Max. axial load carrying capacity**

(guideline value)

29,6

**Reference grease quantity [cm<sup>3</sup>]**

G<sub>ref</sub> 2,5

<sup>1)</sup> Values apply to unmounted bearing set with two bearings arranged back-to-back or face-to-face