
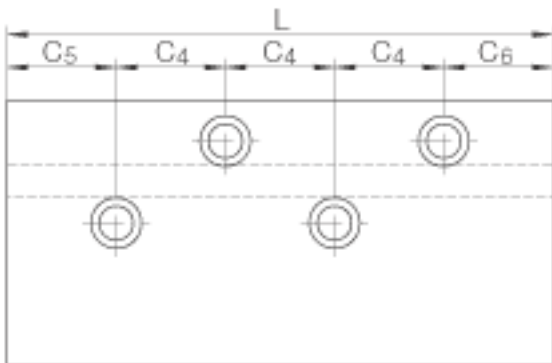
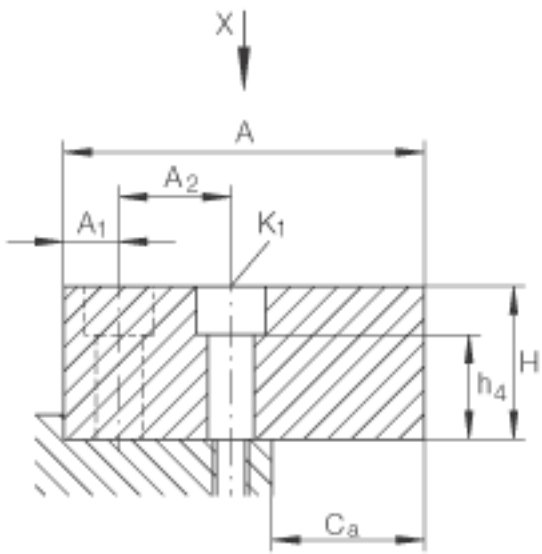


INA UG6628参数

尺寸	A	66	mm	公差: -0, 1
	H	28	mm	公差: -0, 1
	L	2000	mm	最大 L = 标准长度; 适用于从400mm逐渐递 增到 L max的单根导轨 。 中间导轨的长度可 可通过协商定制。长于 Lmax 的导轨可由多根 标准导轨组合供货。 多根导轨的孔的布置方 式在越过联接处仍然是 有规律的。
	A ₁	12	mm	-
	a ₂	18	mm	-
	C ₄	40	mm	-
	C _{5 max}	35	mm	-
	C _{5 min}	15	mm	-
	C _{6 max}	35	mm	-
	C _{6 min}	15	mm	-
	C _a	28	mm	-
	h ₄	16.5	mm	-
	说明	K ₁	M8	

INA UG6628图片

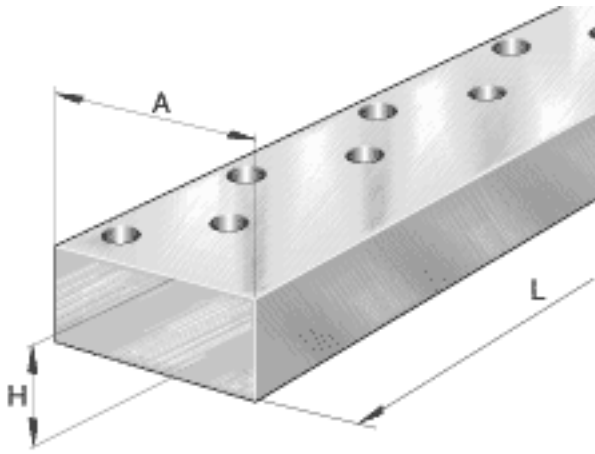

参考资料:<http://www.sozhou.com/p/e49bf02b.html>