


## NSK CRB-18参数

|         |        |         |       |        |
|---------|--------|---------|-------|--------|
| 型号      | 型号     | CRB-18  |       | -      |
| 外形尺寸    | D      | 28.575  | mm    | 外径     |
|         | C      | 15.88   | mm    | 宽度     |
|         | SD     | 11.112  | mm    | 外径     |
| 尺寸      | G      | 7/16-20 | mm    | 螺栓     |
|         | G1     | 12.7    | mm    | -      |
|         | B1     | 42.4    | mm    | -      |
|         | B2     | 25.40   | mm    | -      |
|         | B3     | 6.35    | mm    | -      |
|         | M2     | 3.2     | mm    | -      |
|         | M1     | 4.8     | mm    | -      |
|         | 基本额定载荷 | CR      | 11200 | N      |
| CR2     |        | 1140    | kgf   | 动载荷    |
| 极限载荷    | PMAX   | 6950    | N     | 极限载荷   |
|         | PMAX2  | 710     | kgf   | 极限载荷   |
| 滚轮极限载荷  | LTL    | 7450    | N     | 滚轮极限载荷 |
| 重量      | MASS   | 89      | g     | 重量     |
| 六角形孔的尺寸 | X      | 6.35    | mm    | 双边距离   |
| 偏心轴衬尺寸  | B4     | 0.00    | mm    | -      |
|         | SD1    | 0.000   | mm    | -      |
|         | E      | 0.00    | mm    | -      |
| 挡肩尺寸    | F      | 15.1    | mm    | (最小)   |
| 拧紧力矩    | TT     | 1700    | n. cm | (最大)   |

## NSK CRB-18图片



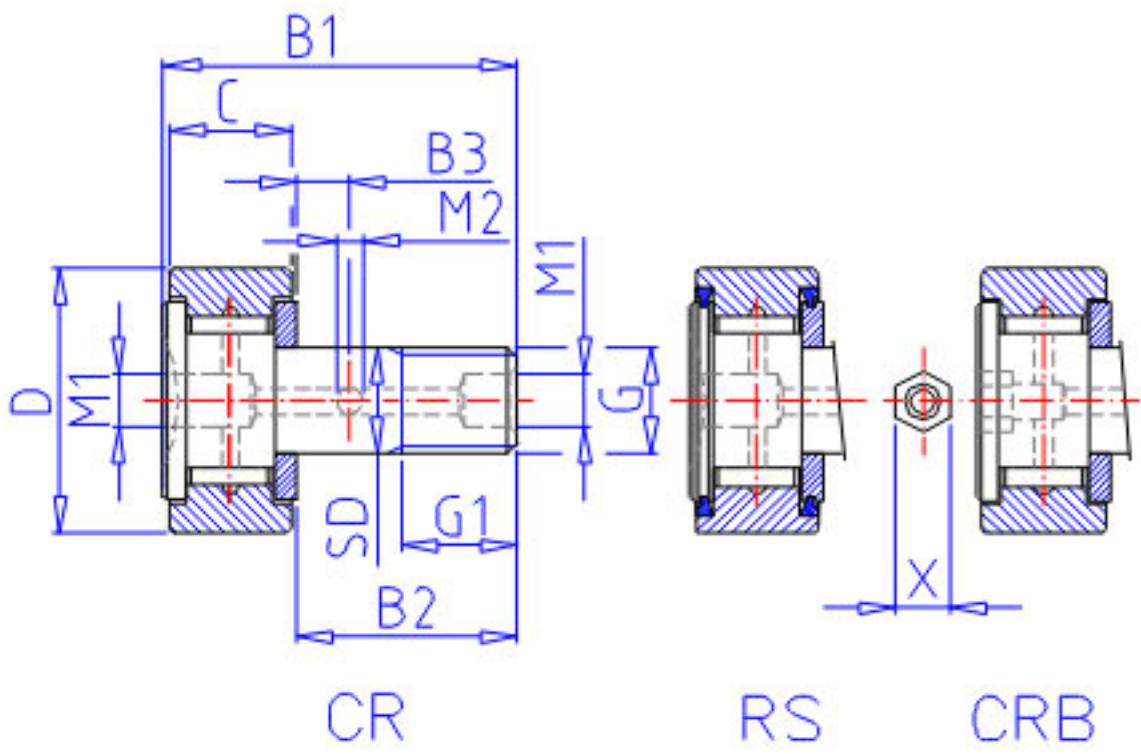

CRE

参考资料:<http://www.sozhou.com/p/ea1fbbb7.html>

