



### FAG NJ2211-E-TVP2参数

尺寸	d	55	mm	-
	D	100	mm	-
	B	25	mm	-
	B <sub>1</sub>	6	mm	-
	B <sub>2</sub>	10	mm	-
	D <sub>1</sub>	86.6	mm	-
	D <sub>a max</sub>	91	mm	-
	d <sub>1</sub>	70.8	mm	-
	d <sub>a max</sub>	65	mm	-
	d <sub>a min</sub>	62	mm	-
	d <sub>c min</sub>	73	mm	-
	F	66	mm	-
	r <sub>1 min</sub>	1.1	mm	-
	r <sub>a max</sub>	1.5	mm	-
	r <sub>a1 max</sub>	1	mm	-
	r <sub>min</sub>	1.5	mm	-
	s	1.3	mm	距离中心位置的轴向偏移
重量	m	812	g	质量
基本额定载荷	C <sub>r</sub>	117000	N	基本额定动载荷，径向
	C <sub>0r</sub>	118000	N	基本额定静载荷，径向
极限转速	n <sub>G</sub>	8700	r/min	极限转速
参考转速	n <sub>B</sub>	4750	r/min	参考速度
疲劳极限载荷	C <sub>ur</sub>	20600	N	疲劳极限载荷，径向

### FAG NJ2211-E-TVP2图片

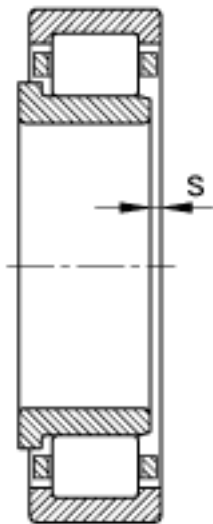

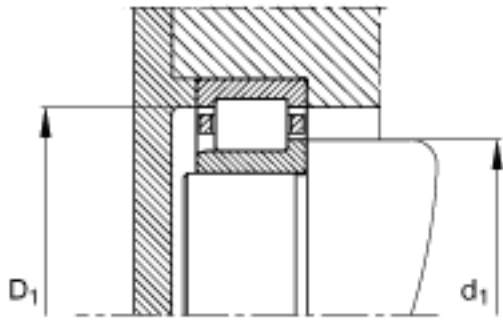

参考资料:<http://www.sozhou.com/p/f6969d08.html>