
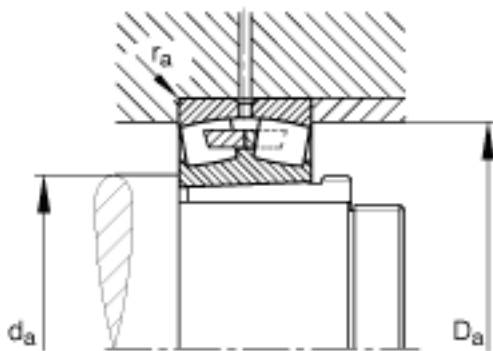
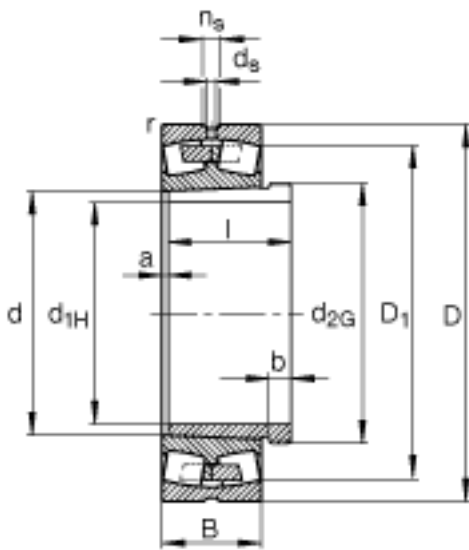


FAG 22348-K-MB + AH2348参数

尺寸	d_{1H}	220	mm	-
	D	500	mm	-
	B	155	mm	-
	a	8	mm	-
	b	30	mm	-
	D_1	420	mm	-
	$D_{a \max}$	480	mm	-
	d	240	mm	-
	d_{2G}	Tr260x4		-
	$d_{a \min}$	260	mm	-
	d_s	12.5	mm	-
	l	189	mm	-
	n_s	23.5	mm	-
	$r_{a \max}$	4	mm	-
	r_{\min}	5	mm	-
说明		AH2348		型号, 退卸套
重量	m	145000	g	质量
	m_1	15600	g	质量, 退卸套
基本额定载荷	C_r	2650000	N	基本额定动载荷, 径向
计算系数	e	0.35		-
	Y_1	1.95		-
	Y_2	2.9		-
基本额定载荷	C_{0r}	3900000	N	基本额定静载荷, 径向
计算系数	Y_0	1.91		-
极限转速	n_G	1560	r/min	极限转速
参考转速	n_B	870	r/min	参考速度
疲劳极限载荷	C_{ur}	249000	N	疲劳极限载荷, 径向

FAG 22348-K-MB + AH2348图片

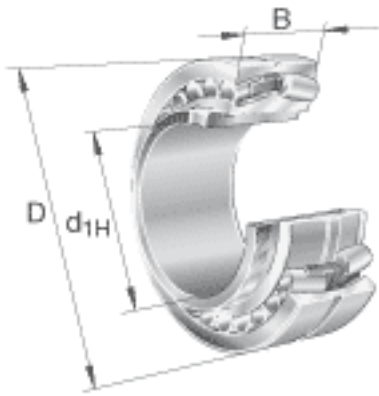

参考资料:<http://www.sozhou.com/p/10005378.html>