
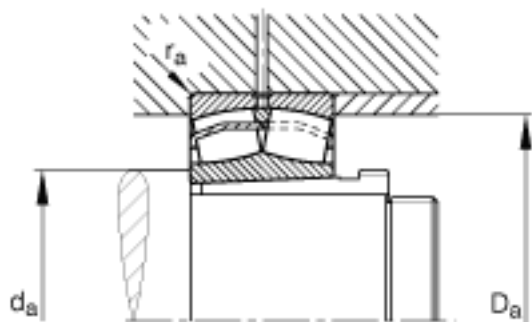
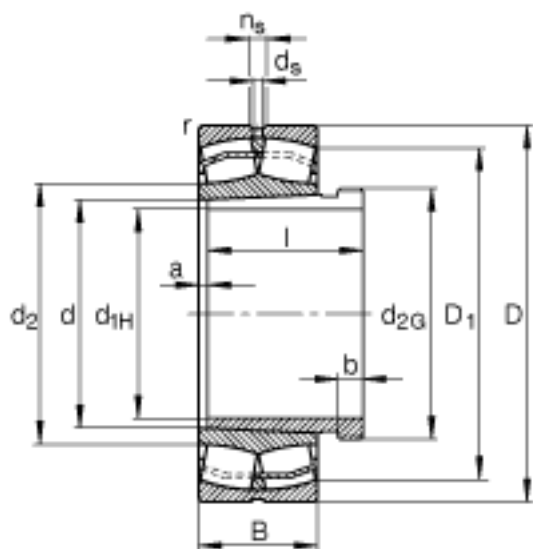


FAG 24024-E1-K30 + AH24024参数

尺寸	d_{1H}	115	mm	-
	D	180	mm	-
	B	60	mm	-
	a	9	mm	-
	b	13	mm	-
	D_1	159.8	mm	-
	$D_{a \max}$	171	mm	-
	d	120	mm	-
	d_2	134.5	mm	-
	d_{2G}	M125x2		-
	$d_{a \min}$	129	mm	-
	d_s	3.2	mm	-
	l	73	mm	-
	n_s	6.5	mm	-
	$r_{a \max}$	2	mm	-
	r_{\min}	2	mm	-
说明		AH24024		型号, 退卸套
计算系数	Y_2	3.47		-
基本额定载荷	C_{0r}	690000	N	基本额定静载荷, 径向
计算系数	Y_0	2.28		-
极限转速	n_G	3450	r/min	极限转速
参考转速	n_B	2400	r/min	参考速度
疲劳极限载荷	C_{ur}	84000	N	疲劳极限载荷, 径向
重量	m	5590	g	质量
	m_1	710	g	质量, 退卸套
基本额定载荷	C_r	450000	N	基本额定动载荷, 径向
计算系数	e	0.29		-
	Y_1	2.33		-

FAG 24024-E1-K30 + AH24024图片

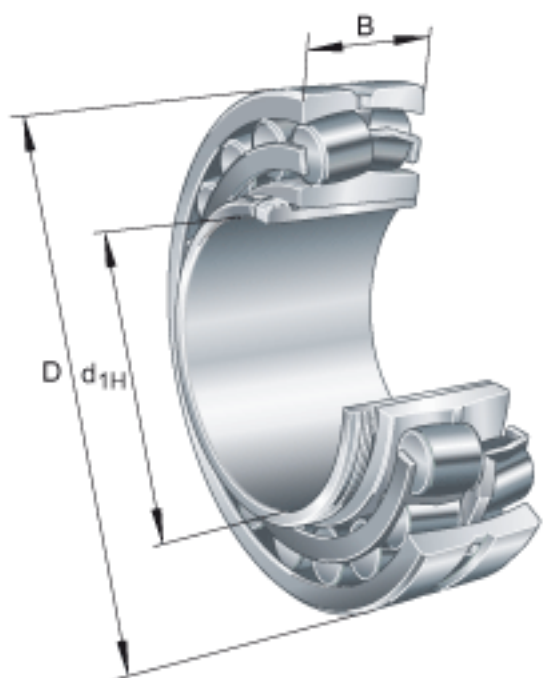

参考资料:<http://www.sozhou.com/p/705adbfed.html>