


FAG NJ417-M1参数

| | | | | |
|------------|---------------|--------|-------|-------------|
| 尺寸 | s | 5.2 | mm | 距离中心位置的轴向偏移 |
| 重量 | m | 10000 | g | 质量 |
| 基本额定载荷 | C_r | 420000 | N | 基本额定动载荷，径向 |
| | C_{0r} | 385000 | N | 基本额定静载荷，径向 |
| 极限转速 | n_G | 5200 | r/min | 极限转速 |
| 参考转速 | n_B | 3750 | r/min | 参考速度 |
| 疲劳极限载荷 | C_{ur} | 66000 | N | 疲劳极限载荷，径向 |
| 尺寸 | d | 85 | mm | - |
| | D | 210 | mm | - |
| | B | 52 | mm | - |
| | B_1 | 14 | mm | - |
| | B_2 | 24 | mm | - |
| | D_1 | 165.7 | mm | - |
| | $D_{a \max}$ | 190 | mm | - |
| | d_1 | 125.8 | mm | - |
| | $d_{a \max}$ | 111 | mm | - |
| | $d_{a \min}$ | 105 | mm | - |
| | $d_{c \min}$ | 128 | mm | - |
| | F | 113 | mm | - |
| | $r_{1 \min}$ | 4 | mm | - |
| | $r_{a \max}$ | 3 | mm | - |
| | $r_{al \max}$ | 3 | mm | - |
| r_{\min} | 4 | mm | - | |

FAG NJ417-M1图片



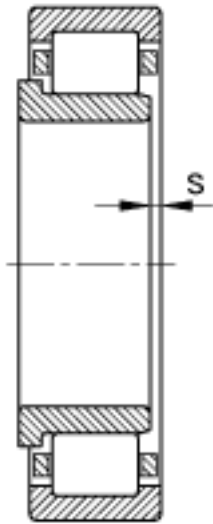

参考资料:<http://www.sozhou.com/p/21eff48a.html>