


NSK 54215U参数

外形尺寸	D	110	mm	宽度	
	T1	47	mm	-	
	T5	49.6	mm	-	
	T7	57	mm	-	
	SR	1.0	mm	(最小)	
	SR1	1.0	mm	(最小)	
基本额定载荷	CAN	78000	N	动载荷	
	COAN	209000	N	静载荷	
	CA	7950	kgf	动载荷	
	COA	21300	kgf	静载荷	
极限转速	GRE	1800	1/min	脂润滑	
	OIL	2600	1/min	油润滑	
尺寸	SD3	110.0	mm	-	
	D1	77	mm	-	
	D2	92	mm	-	
	D3	115	mm	-	
	T2	28.5	mm	-	
	T6	29.8	mm	-	
	T8	33.5	mm	-	
	B	10	mm	-	
	SB	9.5	mm	-	
	A1	47.5	mm	-	
	R	90	mm	-	
	安装尺寸	DA	92	mm	(最大)
		SRA	1.0	mm	(最大)
SRB		1.0	mm	(最大)	
重量	MASS	2060	g	重量	
型号	型号	54215U		-	
外形尺寸	SD2	60	mm	内径	
	SD	75	mm	外径	

NSK 54215U图片

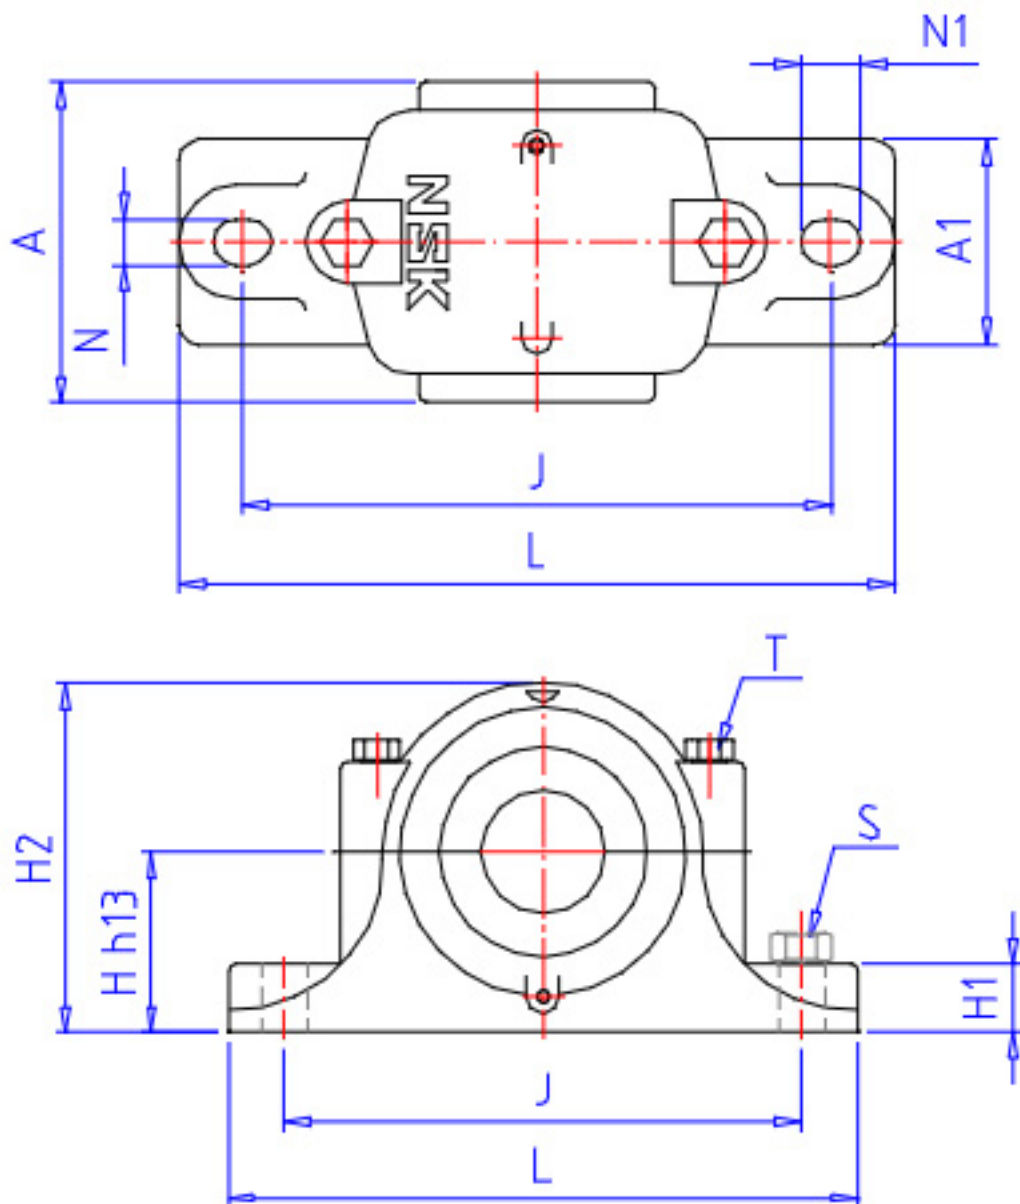

参考资料:<http://www.sozhou.com/p/4328dfef.html>

