
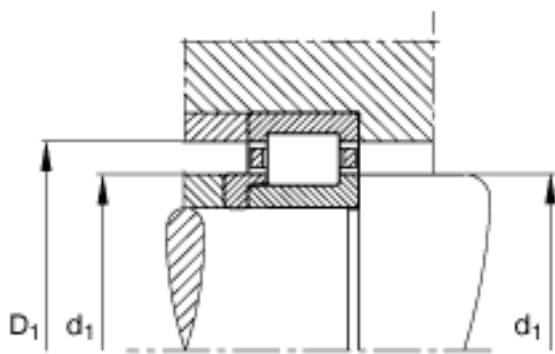


FAG NJ238-E-M1 + HJ238-E参数

尺寸	d	190	mm	-	
	D	340	mm	-	
	B	55	mm	-	
	B ₁	13	mm	-	
	B ₂	21.5	mm	-	
	D ₁	295	mm	-	
	D _{a max}	323	mm	-	
	d ₁	244	mm	-	
	d _{a max}	227	mm	-	
	d _{a min}	207	mm	-	
	d _{c min}	247	mm	-	
	E	306	mm	-	
	F	230	mm	-	
	r _{1 min}	4	mm	-	
	r _{a max}	3	mm	-	
	r _{al max}	3	mm	-	
	r _{min}	4	mm	-	
	s	4.7	mm	距离中心位置的轴向偏移	
	说明		HJ238-E		型号, L 型圈
	重量	m	23200	g	质量
m ₁		2170	g	质量, L 型圈	
基本额定载荷	C _r	680000	N	基本额定动载荷, 径向	
	C _{0r}	930000	N	基本额定静载荷, 径向	
极限转速	n _G	3050	r/min	极限转速	
参考转速	n _B	1750	r/min	参考速度	
疲劳极限载荷	C _{ur}	111000	N	疲劳极限载荷, 径向	

FAG NJ238-E-M1 + HJ238-E图片

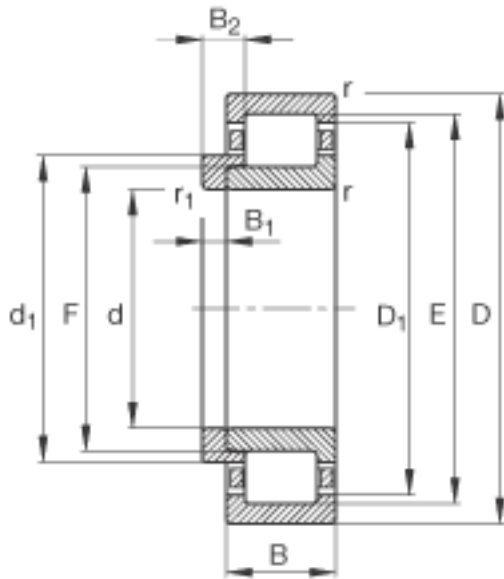

参考资料:<http://www.sozhou.com/p/8533d2f6.html>

