
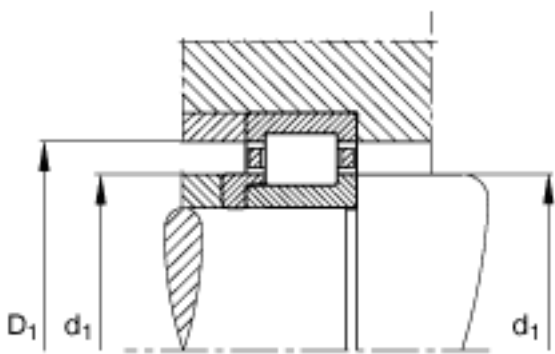


FAG NJ213-E-TVP2 + HJ213-E参数

尺寸	d	65	mm	-	
	D	120	mm	-	
	B	23	mm	-	
	B <sub>1</sub>	6	mm	-	
	B <sub>2</sub>	10	mm	-	
	D <sub>1</sub>	104.3	mm	-	
	D <sub>a max</sub>	111	mm	-	
	d <sub>1</sub>	84.4	mm	-	
	d <sub>a max</sub>	77	mm	-	
	d <sub>a min</sub>	74	mm	-	
	d <sub>c min</sub>	87	mm	-	
	E	108.5	mm	-	
	F	78.5	mm	-	
	r <sub>1 min</sub>	1.5	mm	-	
	r <sub>a max</sub>	1.5	mm	-	
	r <sub>al max</sub>	1.5	mm	-	
	r <sub>min</sub>	1.5	mm	-	
	s	1.4	mm	距离中心位置的轴向偏移	
	说明		HJ213-E		型号, L 型圈
	重量	m	1060	g	质量
m <sub>1</sub>		127	g	质量, L 型圈	
基本额定载荷	C <sub>r</sub>	128000	N	基本额定动载荷, 径向	
	C <sub>0r</sub>	120000	N	基本额定静载荷, 径向	
极限转速	n <sub>G</sub>	7100	r/min	极限转速	
参考转速	n <sub>B</sub>	5000	r/min	参考速度	
疲劳极限载荷	C <sub>ur</sub>	20700	N	疲劳极限载荷, 径向	

FAG NJ213-E-TVP2 + HJ213-E图片

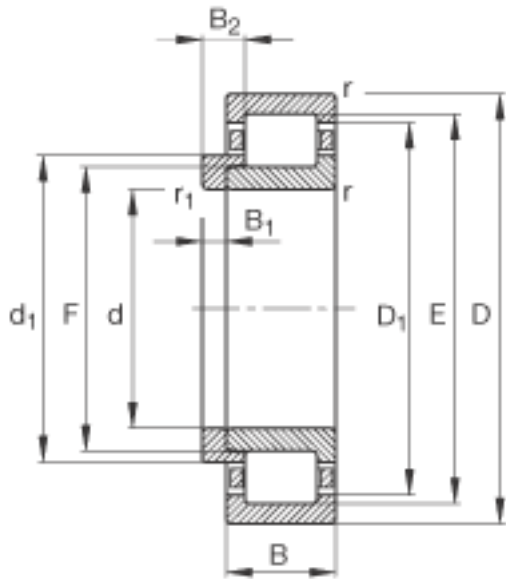

参考资料:<http://www.sozhou.com/p/dbd0b437.html>

